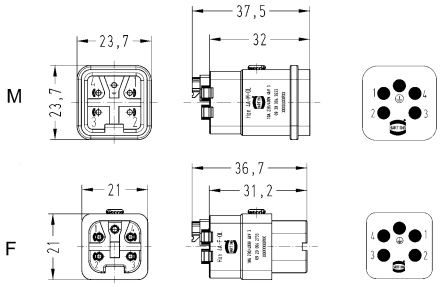
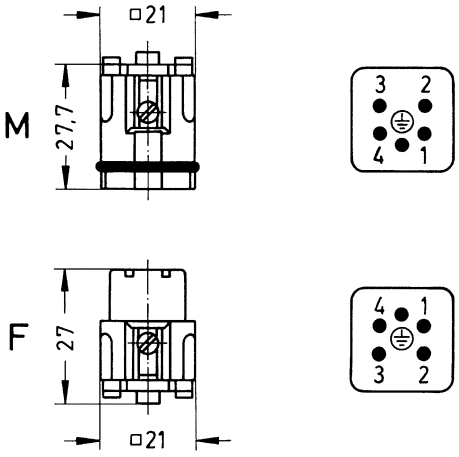
Number of contacts

4+ ⏚

10 A 230/400 V 4 kV 3
10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number Male	Part number Female	Drawing (dimensions in mm)
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0.5 ... 2.5	09 20 004 2633	09 20 004 2733	 Contact arrangement (view from termination side)
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0.25 ... 1.5	09 20 004 2634	09 20 004 2734	
Han A®, Screw termination, Contact surface: Silver plated 	0.75 ... 1.5	09 20 004 2611	09 20 004 2711	 Contact arrangement (view from termination side) Stripping length 4.5 mm Tightening torque 0.25 Nm