
Dämpfung / *Attenuation*	[@ 20 °C / 68 °F]
Frequenz / *Frequency* (MHz)	Maximum dB/100 m
50	7.3
100	10.2
200	12.1
300	12.8
400	14.3
500	16.1
800	20.6
1000	22.7
1350	26.2
1750	30.1
2050	32.6
2150	33.4



1	Innenleiter, Aderdurchmesser / *inner conductor, core diameter*	Ø 0.90 ± 0.01 mm, CCS
2	Durchmesser Dielektrikum / *Dielectric diameter*	Ø 4.80 ± 0.08 mm, PE
3	Typ 1, Schirmung Folie / *Type 1, shielding foil*	Al
4	Typ 2, Schirmung Geflecht / *Type 2, shielding braid*	0.12 mm, Al 64x
5	Durchmesser Kabelmantel (ca.) / *Cable sheath diameter (approx.)*	Ø 6.50 ± 0.15 mm

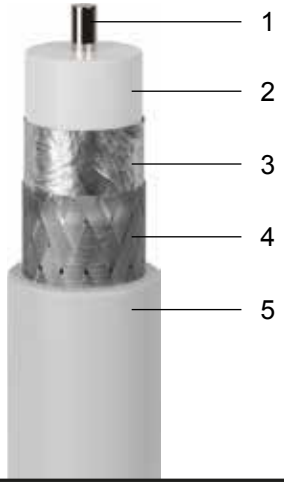

90 dB SAT-Koaxialkabel, 2x geschirmt, 25 m, Weiß

- für digitale SAT- und BK-Kabelanlagen mit Stahl/Kupfer Innenleiter
- geeignet zum Empfang von FULL HD 1080p/ULTRA HD 4K
- digitaltauglich für die Hausinstallation von HDTV per DVB-S/S2, DVB-T/T2, DVB-C/C2
- doppelter Signalschirm für ausreichenden Schutz über lange Distanzen
- ausgelegt für hervorragenden, störungsfreien Empfang, optimaler Schutz gegen Störeinflüsse
- Meterskalierung auf dem Kabel

- Betriebstemperatur: - 20 °C bis + 70 °C
- Impedanz: 83 ± 3 Ohm
- DC-Widerstand Innenleiter: 150 Ohm/km
- DC-Widerstand Abschirmleiter: 46 Ohm/km
- Ausbreitungsgeschwindigkeit: 82 %
- Rückflussdämpfung: ≥20 dB @ 5-1002 MHz
  ≥15 dB @ 1000-2150 MHz
- Gewicht: 860 g

90 dB coaxial antenna cable, 2x shielded, 25 m, white

- *for digital Satellite- and CATV-cable systems, with copper/steel mixture inner conductor*
- *suitable for receiving FULL HD 1080p/ULTRA HD 4K*
- *digitally suitable for the domestic installation of HDTV via DVB-S/S2, DVB-T/T2, DVB-C/C2*
- *double signal shield for sufficient protection over long distances*
- *designed for excellent, interference-free reception, optimum protection against interference*
- *Meter scaling on the cable*

- *Operating temperature: - 20 °C to + 70 °C*
- *Impedance: 83 ± 3 Ohm*
- *DC resistance inner conductor: 150 Ohm/km*
- *DC resistance shield conductor: 46 Ohm/km*
- *Velocity of Propagation: 82 %*
- *Return Loss: ≥20 dB @ 5-1002 MHz*
  ≥15 dB @ 1000-2150 MHz
- *Weight: 860 g*

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	24.06.2020	sm	Goobay Koaxial Kabel, CCS, 2-x geschirmt, 90dB, 25m	
		gepr.:	24.06.2020	ss		
		Norm:			Zeichnungs-Nr.: 49760	von
		Änderungen vorbehalten / *Subject to change*				