SIEMENS

Data sheet BVP:085090

BD01-AK02X/ZS3 TAP-OFF UNIT

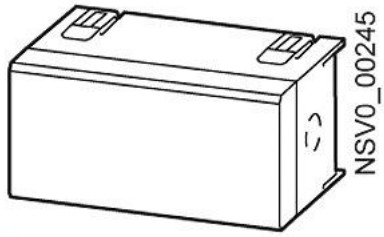

Figure similar

Model	
product designation	tap-off unit for BD01 busbar trunking system
operating voltage / at AC	
● at 50 Hz / rated value / maximum	400 V
● at 60 Hz / rated value / maximum	400 V
Protection class	
protection class IP	IP54
Main circuit	
operating frequency / rated value	
● minimum	50 Hz
● maximum	60 Hz
operational current	
● for circuit 1 / at AC / at 50 Hz / rated value / maximum	32 A
● for circuit 1 / at AC / at 60 Hz / rated value / maximum	32 A
Connections	
connectable conductor cross-section / in the outgoing unit	
● minimum	0.75 mm²
● maximum	10 mm²
Tap-off points	
outgoing unit version	cable entry
size of the outgoing unit	02
number of poles / of the outgoing unit	5
Mechanical Design	
height	77.5 mm
width	116 mm
length	200 mm
number of modular width units	3
product component / locking mechanism	Yes
Further information	

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:085090
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/BVP:085090
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:085090
CAx-Online-Generator

Subject to change without notice
© Copyright Siemens

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications



Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens