SIEMENS

Data sheet 8WD4220-0FA



Buzzer element, black, continuous tone or pulsating, adjustable, 85 dB, 24 V AC/DC, diameter 50 mm

product brand name	SIRIUS
product designation	Buzzer element
General technical data	
product function adjustable acoustic signal	Yes
type of voltage of the operating voltage	AC/DC
operating voltage	
● 1 at DC rated value	24 V
● 1 at AC at 50 Hz rated value	24 V
● 1 at AC at 60 Hz rated value	24 V
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage	-10 %
consumed current maximum	30 mA
tone frequency	
● 1	2.5 kHz
reference code	
● according to EN 61346-2	P
● **according to IEC 81346-2**	P
Acoustic signal	
type of acoustic signal	continuous tone / pulse tone
service life of acoustic signal device	5 000 h
loudness level	85 dB
loudness level	85 ... 85 dB
tone frequency of alternating tone	2.5 ... 2.5 kHz
Enclosure	
height	72 mm
width	52 mm
outer diameter of the signal column element	50 mm
material	PC
color	black
fastening method	Bayonet
protection class IP	IP54
Ambient conditions	
ambient temperature during operation	-20 ... +50 °C
Certificates/ approvals	

General Product Approval	EMC	Declaration of Conformity

Subject to change without notice
© Copyright Siemens

Confirmation

UK Declaration of Conformity

other

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4220-0FA
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4220-0FA
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8WD4220-0FA
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4220-0FA&lang=en

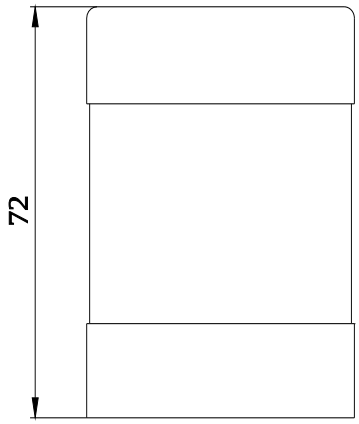



Subject to change without notice
© Copyright Siemens

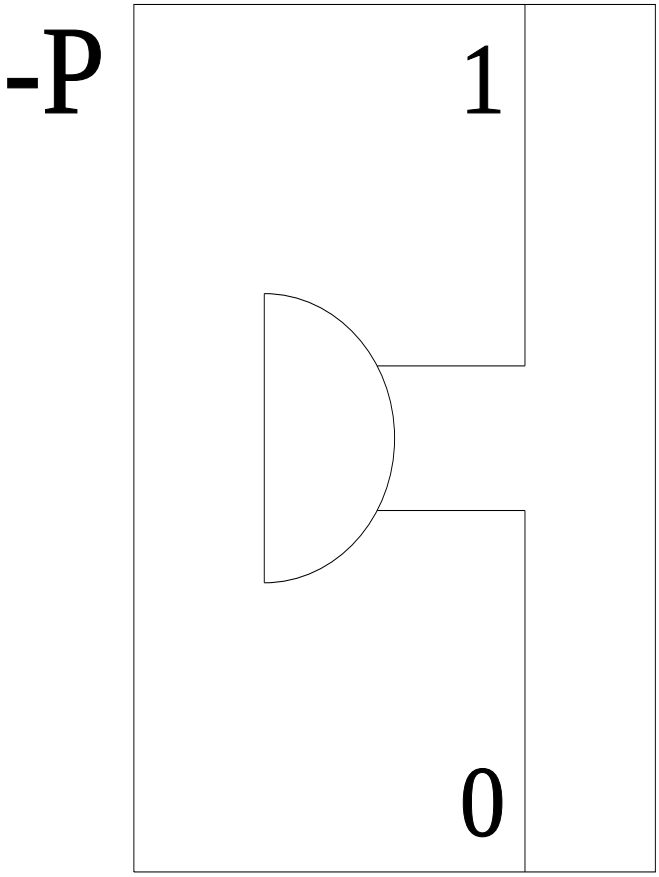

last modified: 12/23/2020

Subject to change without notice
© Copyright Siemens