KARTA KATALOGOWA

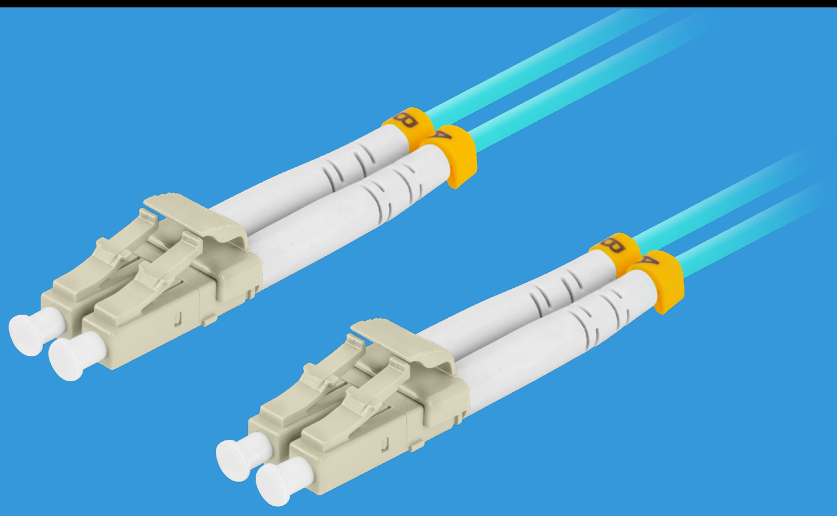

FO-LULU-MD31-0___-TQ

PATCHCORD ŚWIATŁOWÓD

SPECYFIKACJA PRODUKTU:

- Typ złącza: LC
- Standard polerowania: UPC - ULTRA PHYSICAL CONTACT
- Rodzaj włókna: OM3
- Rodzaj światłowodu: wielomodowy (MM)
- Średnica włókna: 50/125 µm
- Konstrukcja przewodu: DUPLEX
- Średnica przewodu: 3.0 mm
- Powłoka: LSZH, LSOH (Low smoke zero halogen)
- Tłumienność wtrąceniowa: ≤ 0,25 dB
- Tłumienność odbiciowa: ≥ 50 dB
- Temperatura pracy: -40 – 85°C
- Minimalny promień zgięcia: 7.5 mm
- Kolor: turkusowy
- Długość przewodu: 1 m, 2 m, 3 m, 5 m

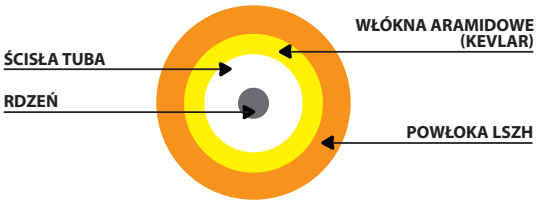



NR KATALOGOWY	NAZWA PEŁNA
FO-LULU-MD31-0010-TQ	PATCHCORD ŚWIATŁOWÓD MM LC/UPC-LC/UPC DUPLEX 3.0MM OM3 50/125 LSZH 1M AQUA LANBERG
FO-LULU-MD31-0020-TQ	PATCHCORD ŚWIATŁOWÓD MM LC/UPC-LC/UPC DUPLEX 3.0MM OM3 50/125 LSZH 2M AQUA LANBERG
FO-LULU-MD31-0030-TQ	PATCHCORD ŚWIATŁOWÓD MM LC/UPC-LC/UPC DUPLEX 3.0MM OM3 50/125 LSZH 3M AQUA LANBERG
FO-LULU-MD31-0050-TQ	PATCHCORD ŚWIATŁOWÓD MM LC/UPC-LC/UPC DUPLEX 3.0MM OM3 50/125 LSZH 5M AQUA LANBERG

© LANBERG. All rights reserved. LANBERG name and logo, and all related product and service names, design marks and slogans are the trademarks or registered trademarks of LANBERG. All other product and service marks contained here in are the trademarks of their respective owners