Technical Datasheet

ANAMET EUROPE

Galwin 5 - 1046 AW Amsterdam
P.O. Box 8155 - 1005 AD Amsterdam
The Netherlands

Tel.: +31 (0)20 586 3586
Fax: +31 (0)20 688 1126
Email: sales@anamet.nl
Website: www.anameteurope.com

Vat Reg NL001442429B01
Trade register Amsterdam 330 60 401

NUMBER

TDS-3577

PRODUCT DESCRIPTION

Ana-Quick fittings for corrugated nylon conduit

PRODUCT RANGE

Ana-Quick product range

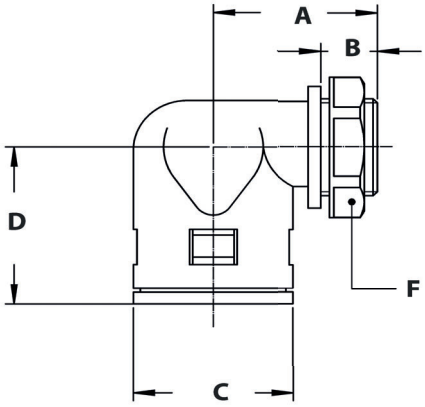



ISO 90° fitting, male, PA6, colour black, including locknut

THREAD ISO	ANA-QUICK SIZE (DN)	MIN. INTERNAL BORE (MM)	DIMENSIONS IN MM					STANDARD PACKAGE	ARTICLE NUMBER	WEIGHT (KG/100)
			A	B	C	D	F			
M12 x 1,5	7,5	7,8	25	10	17	29	18	50	968.312.2	0,7
M16 x 1,5	10	11,5	26	10	20	31	22	50	968.315.2	0,9
M16 x 1,5	12	11,5	29	12	23	35	22	50	968.316.2	1,2
M20 x 1,5	12	15,2	30	13	23	36	27	50	968.317.2	1,3
M20 x 1,5	17	15,2	34	13	30	39	27	50	968.320.2	1,7
M25 x 1,5	17	18,0	34	13	30	39	33	20	968.322.2	1,9
M25 x 1,5	23	19,5	39	13	37	43	33	20	968.325.2	2,7
M32 x 1,5	29	26,0	42	15	44	48	41	10	968.332.2	4,2
M40 x 1,5	37	33,0	48	15	52	57	50	8	968.340.2	6,4
M50 x 1,5	50	42,0	55	16	65	66	62	5	968.350.2	10,3
M63 x 1,5	50	52,0	55	16	65	66	74	5	968.360.2	9,5

ANA-QUICK POLYAMIDE FITTINGS

The universal Ana-Quick fitting fits all types of Ana-Quick conduit. The Ana-Quick fitting is easy to connect and due to the integrated release clips also very simple to dis-connect.

Material & Construction:

Construction: 1 piece fitting with integrated release clip and locknut included.
Material: Fitting, clip and locknut are made of halogen free Polyamide PA6.

Temperature: -40°C till +120°C continuous.
Protection class: IP 65 (dust-proof, waterprotected).
Colour: Black.