LPFS120

METALOWY PRZEŁĄCZNIK PŁASKI Ø30MM SERII PLATINUM, POKRĘTŁO KRÓTKIE, 2 POZYCJE, 0 - 1



Przeznaczenie produktu			Przełącznik sterowniczy, dźwignia - 2 pozycje
Seria produktu			LPFS12
Charakterystyka ogólna			
Kolor			Czarny
Typ pozycji			Selector switch
Materiał			Stop cynku i aluminium
Stopień ochrony według IEC			IP66, IP67 oraz IP69K
Właściwości mechaniczne			
Trwałość mechaniczna		cycles	1000000
Montaż			Bez adaptera montażowego
Adapter do montażu			LPXAU120M
Dane techniczne UL			
Stopień ochrony według UL			Typ 1, 2, 3R, 4, 4X, 12, 12K
Warunki otoczenia			
Temperatura			
	Temperatura pracy		
		min. °C	-25
		maks. °C	+70
	Temperatura składowania		
		min. °C	-40
		maks. °C	+85

Wymiary

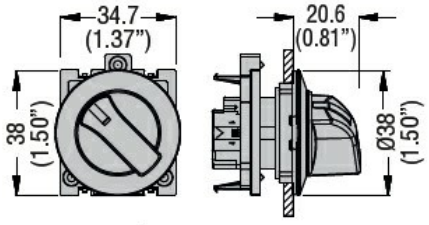

Lever

Certyfikaty i zgodność

Zgodność		
	CSA C22.2 n° 14	
	IEC/EN/BS 60947-1	
	IEC/EN/BS 60947-5-1	
	UL508	
Certyfikaty		
	cULus	

Klasyfikacja ETIM

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8,0

EC002611 - Przełącznik sterujący

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding