LPFBL103

METALOWY PRZYCISK PŁASKI PODŚWIETLANY Ø30MM SERII PLATINUM, SAMOCZYNNY POWRÓT, KRYTY. ZIELONY



Przeznaczenie produktu			Przyciski podświetlane, samoczynny powrót - kryte
Seria produktu			LPFBL10
Charakterystyka ogólna			
Kolor			Zielony
Typ pozycji			Flush pushbutton
Materiał			Stop cynku i aluminium
Stopień ochrony według IEC			IP66, IP67 oraz IP69K
Właściwości mechaniczne			
Trwałość mechaniczna – przyciski z samoczynnym powrotem		cycles	5000000
Montaż			Bez adaptera montażowego
Adapter do montażu			LPXAU120M
Dane techniczne UL			
Stopień ochrony według UL			Typ 1, 2, 3R, 4, 4X, 12, 12K
Warunki otoczenia			
Temperatura			
	Temperatura pracy		
		min. °C	-25
		maks. °C	+70
	Temperatura składowania		
		min. °C	-40
		maks. °C	+85

Wymiary

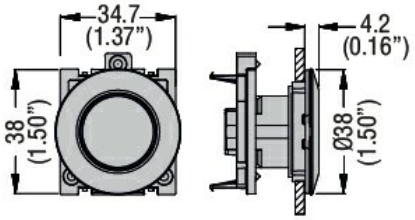

Certyfikaty i zgodność

Zgodność		
	CSA C22.2 n° 14	
	IEC/EN/BS 60947-1	
	IEC/EN/BS 60947-5-1	
	UL508	
Certyfikaty		
	cULus	

Klasyfikacja ETIM

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8,0

EC000221 - Napęd przycisku sterowniczego

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding