GA032ARY

ROZŁĄCZNIK IZOLACYJNY GA032ARY, Z POKRĘTŁEM ŻÓŁTO/CZERWONYM, 32A, AC21A



Liczba pól		Nr.	3
Typ napięcia roboczego			AC
Właściwości styków			
Prąd roboczy termiczny umowny Ith, IEC		A	32
Znamionowy prąd krótkotrwały wytrzymywany (1s) Icw (rms)		kA	0.8
Właściwości mechaniczne			
Moment obrotowy dokręcania zacisków			
	min.	Nm	1.8
	maks.	Nm	2
	min.	Ibin	16
	maks.	Ibin	18
Dane techniczne UL			
Norma UL			UL98

Wymiary [mm (in)]

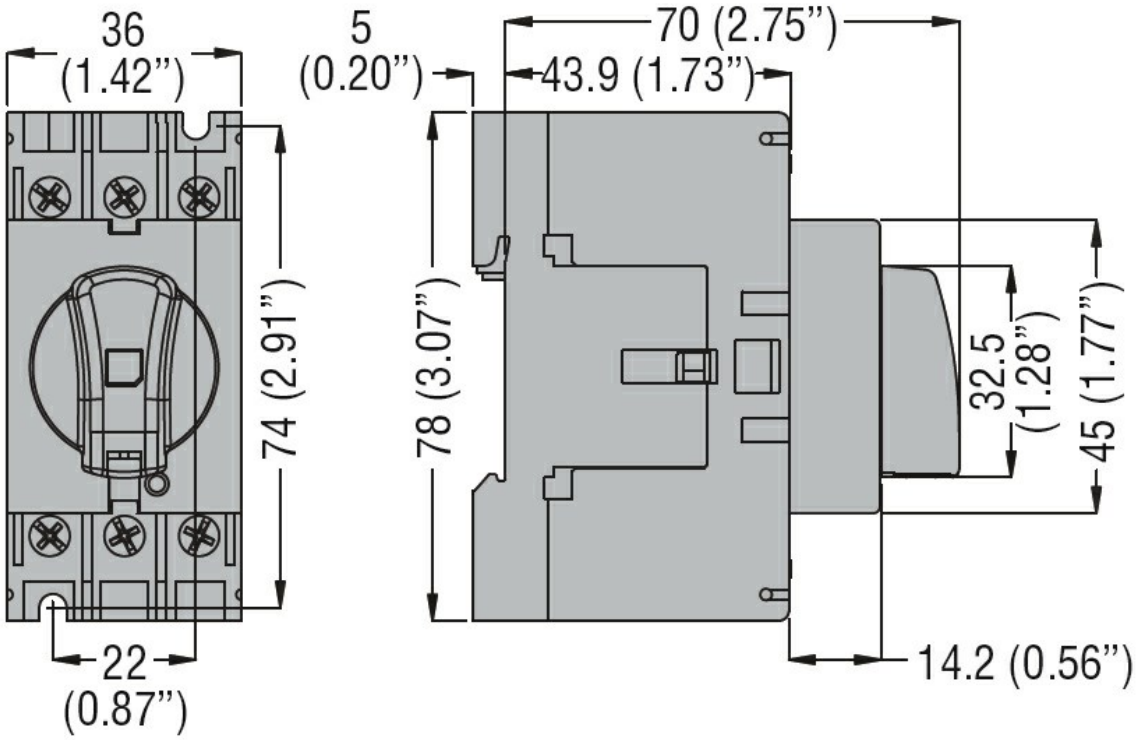

Schemat połączeń elektrycznych

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

GA032ARY

ROZŁĄCZNIK IZOLACYJNY GA032ARY, Z POKRĘTŁEM ŻÓŁTO/CZERWONYM, 32A, AC21A



Certyfikaty i zgodność

Zgodność	
	CSA C22.2 n°60947-4-1
	IEC/EN 60947-1
	IEC/EN 60947-3
	UL60947-4-1
Certyfikaty	
	CCC
	CSA C22.2 n°60947-4-1
	cULus according to UL60947-4-1
	EAC
	KEMA

Klasyfikacja ETIM

ETIM 8,0	EC000216 - Rozłącznik izolacyjny

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding