
GA063ARY

ROZŁĄCZNIK IZOLACYJNY GA063ARY, Z POKRĘTŁEM ŻÓŁTO/CZERWONYM, 63A, AC21A



Liczba pól		Nr.	3
Typ napięcia roboczego			AC
Właściwości styków			
Prąd roboczy termiczny umowny Ith, IEC		A	63
Znamionowy prąd krótkotrwały wytrzymywany (1s) Icw (rms)		kA	2.5
Właściwości mechaniczne			
Moment obrotowy dokręcania zacisków			
	min.	Nm	5
	maks.	Nm	6
	min.	Ibin	45
	maks.	Ibin	54
Dane techniczne UL			
Norma UL			UL98

Wymiary [mm (in)]

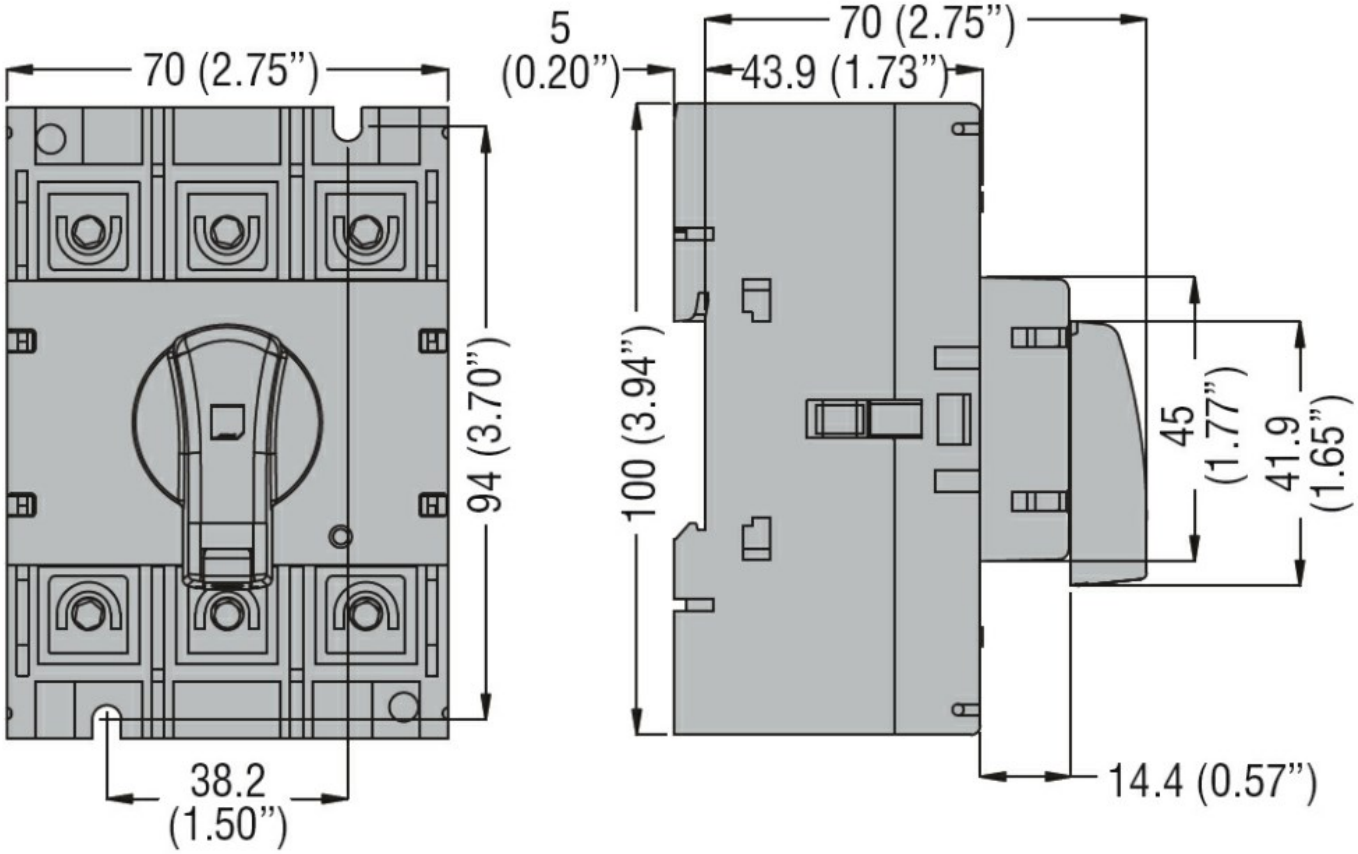


Schemat połączeń elektrycznych

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

GA063ARY

ROZŁĄCZNIK IZOLACYJNY GA063ARY, Z POKRĘTŁEM ŻÓŁTO/CZERWONYM, 63A, AC21A



Certyfikaty i zgodność

Zgodność

CSA C22.2 n°60947-4-1
IEC/EN 60947-1
IEC/EN 60947-3
UL60947-4-1

Certyfikaty

CCC
CSA C22.2 n°60947-4-1
cULus according to UL60947-4-1
EAC
KEMA

Klasyfikacja ETIM

ETIM 8,0	EC000216 - Rozłącznik izolacyjny

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding