# EXS1032

JEDNOFAZOWY ELEKTRONICZNY PRZEKŁADNIK PRĄDOWY, 32A, Z PRZEWODEM RJ45 O DŁUGOŚCI 2M



| | | | |
|---|---|---|---|
| Przeznaczenie produktu | | | Elektroniczne przetworniki prądu do systemu EASY BRANCH |
| Seria produktu | | | EXS1032 |
| Typ | | | Jednofazowy |
| **Wejścia prądowe** | | | |
| Prąd znamionowy (Ie) | | A | 32 |
| **Prąd** | | | |
| Maksymalny wg IEC (Imax) | | A | 32 |
| znamionowy wg IEC (Iref-Ib) | | A | 5 |
| Rozruchu wg IEC (Ist) | | mA | 10 |
| **Izolacja** | | | |
| Znamionowe napięcie izolacji Ui IEC/EN | | V | 600 |
| **Właściwości mechaniczne** | | | |
| Materiał obudowy | | | Poliamid |
| Typ zacisków | | | RJ45 |
| Masa | | g | 120 |
| **Warunki otoczenia** | | | |
| Temperatura | | | |
| | Temperatura pracy | | |
| | min. | °C | -30 |
| | maks. | °C | +70 |
| | Temperatura składowania | | |
| | min. | °C | -30 |
| | maks. | °C | +80 |
| Wilgotność względna | | % | <80 |
| Maksymalny stopień zanieczyszczenia | | | 2 |
| Kategoria przepięciowa | | | 3 |
| Stopień ochrony | | | IP20 |

**Wymiary [mm (in)]**

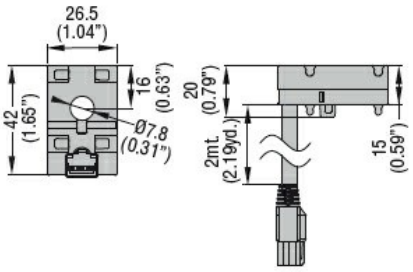


**Certyfikaty i zgodność**

| | |
|---|---|
| Zgodność | |
| | IEC/EN/BS 61000-6-2 |
| | IEC/EN/BS 61000-6-4 |
| | IEC/EN/BS 61010-1 |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certyfikaty

| |
|---|
| CE |
| EAC |
| UKCA |

## Klasyfikacja ETIM

| | |
|---|---|
| ETIM 8,0 | EC002475 - Przetwornik prądowy |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding