GAX7055

TRZPIEŃ DO WERSJI ZE SPRZĘGŁEM, 55MM, DO GA...A I GA...D



Wymiary [mm (in)]

Shaft extensions for door coupling handles

GAX7...

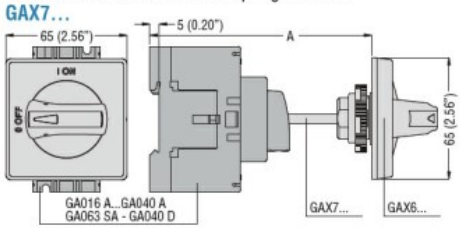

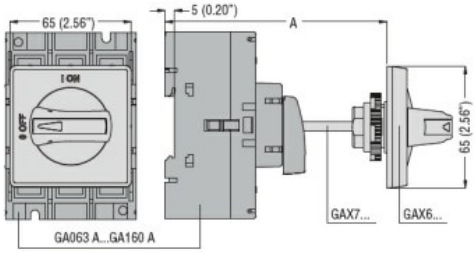

Extension	Length [mm (in)]	A [mm (in)] maximum Type of handle					
		GAX61...	GAX62...	GAX63...	GAX64...	GAX67 B	GAX68...
GAX7055	55 (2.16")	99 (3.90")	97 (3.82")	102 (4.01")	116 (4.57")	97 (3.82")	98.5 (3.88")
GAX7070	70 (2.75")	114 (4.49")	112 (4.41")	117 (4.61")	131 (5.16")	112 (4.41")	113.5 (4.47")
GAX7090	90 (3.54")	134 (5.27")	132 (5.20")	137 (5.39")	151 (5.94")	132 (5.20")	133.5 (5.25")
GAX7150	150 (5.90")	194 (7.64")	192 (7.56")	197 (7.75")	211 (8.31")	192 (7.56")	193.5 (7.62")
GAX7200	200 (7.87")	244 (9.61")	242 (9.53")	247 (9.72")	261 (10.27")	242 (9.53")	243.5 (9.59")
GAX7300	300 (11.81")	344 (13.54")	342 (13.46")	347 (13.66")	361 (14.21")	342 (13.46")	343.5 (13.52")
GAX7400	400 (15.75")	444 (17.48")	442 (17.40")	447 (17.60")	461 (18.15")	442 (17.40")	443.5 (17.46")
GAX7500	500 (19.68")	544 (21.42")	542 (21.34")	547 (21.53")	561 (22.09")	542 (21.34")	543.5 (21.40")

GAX7... used with GAX50 00, GAX50 01 and GAX60 00

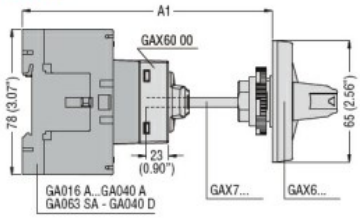

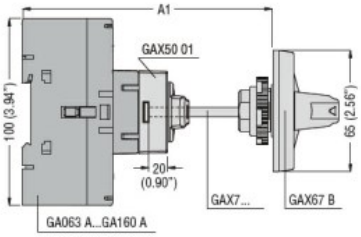

Extension	Length [mm (in)]	A1 [mm (in)] maximum Used with GAX60 00 Type of handle					Used with GAX50 00/GAX50 01
		GAX61...	GAX62...	GAX63...	GAX64...	GAX68...	GAX67 B
GAX7055	55 (2.16")	116 (4.57")	114 (4.49")	119 (4.68")	133 (5.24")	115.5 (4.55")	114 (4.49")
GAX7070	70 (2.75")	131 (5.16")	129 (5.08")	134 (5.27")	148 (5.83")	130.5 (5.14")	129 (5.08")
GAX7090	90 (3.54")	151 (5.94")	149 (5.87")	154 (6.06")	168 (6.61")	150.5 (5.92")	149 (5.87")
GAX7150	150 (5.90")	211 (8.31")	209 (8.23")	214 (8.42")	228 (8.98")	210.5 (8.29")	209 (8.23")
GAX7200	200 (7.87")	261 (10.27")	259 (10.20")	264 (10.39")	278 (10.94")	260.5 (10.25")	259 (10.20")
GAX7300	300 (11.81")	361 (14.21")	359 (14.13")	364 (14.33)	378 (14.88")	360.5 (14.20")	359 (14.13")
GAX7400	400 (15.75")	461 (18.15")	459 (18.07")	464 (18.27")	468 (18.42")	460.5 (18.13")	459 (18.07")
GAX7500	500 (19.68")	561 (22.09")	559 (22.01")	564 (22.20")	578 (22.75")	560.5 (22.07")	559 (22.01")

Certyfikaty i zgodność

Zgodność

CSA C22.2
IEC/EN 60947-1
IEC/EN 60947-3
UL508
UL98

Certyfikaty

CCC
cULus according to UL508 /CSA C22.2 n°14
cULus according to UL98 / CSA C22.2 n°4
EAC

Klasyfikacja ETIM

ETIM 8,0

EC002498 - Akcesoria/części zamienne do aparatury niskonapięciowej

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding