
LPSS331

METALOWY PRZEŁĄCZNIK Ø22MM SERII PLATINUM, Z KLUCZEM, 3 POZYCJE, 1 - 0 - 2. WYJĘCIE KLUCZA W POZYCJI 1 LUB 0 LUB 2



Przeznaczenie produktu			Przełącznik sterowniczy, klucz - 3 pozycje
Seria produktu			LPSS33
Charakterystyka ogólna			
Kolor			Czarny
Typ pozycji			1 - 0 - 2, wyjęcie klucza na 1, 0 i 2
Materiał			Stop cynku i aluminium
Stopień ochrony według IEC			IP66, IP67 oraz IP69K
Właściwości mechaniczne			
Trwałość mechaniczna		cycles	1000000
Montaż			Bez adaptera montażowego
Adapter do montażu			LPXAU120M
Dane techniczne UL			
Stopień ochrony według UL			Typ 1, 2, 3R, 4, 4X, 12, 12K
Warunki otoczenia			
Temperatura			
	Temperatura pracy		
		min. °C	-25
		maks. °C	+70
	Temperatura składowania		
		min. °C	-40
		maks. °C	+85

Wymiary

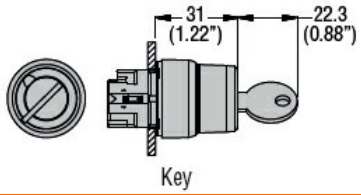

Certyfikaty i zgodność	
Zgodność	
	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certyfikaty	
	cULus
Klasyfikacja ETIM	

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8,0

EC002611 - Przełącznik sterujący

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding