SM1X3040P

RIGID SM1 BREAKER-CONTACTOR CONNECTION. FOR MOTOR PROTECTION BREAKER SM1P... WITH BG...MINI-CONTACTORS



Product designation		Rigid SM1 breaker-contactor connections
Product type designation		SM1X
Description		Rigid SM1P breaker - BG contactor connections.
Accessories for		SM1P…
Operational characteristics		
IEC maximum current (Imax)	A	12
Mechanical features		
Operating position		
	normal	Other
Weight	g	19
Dimensions		

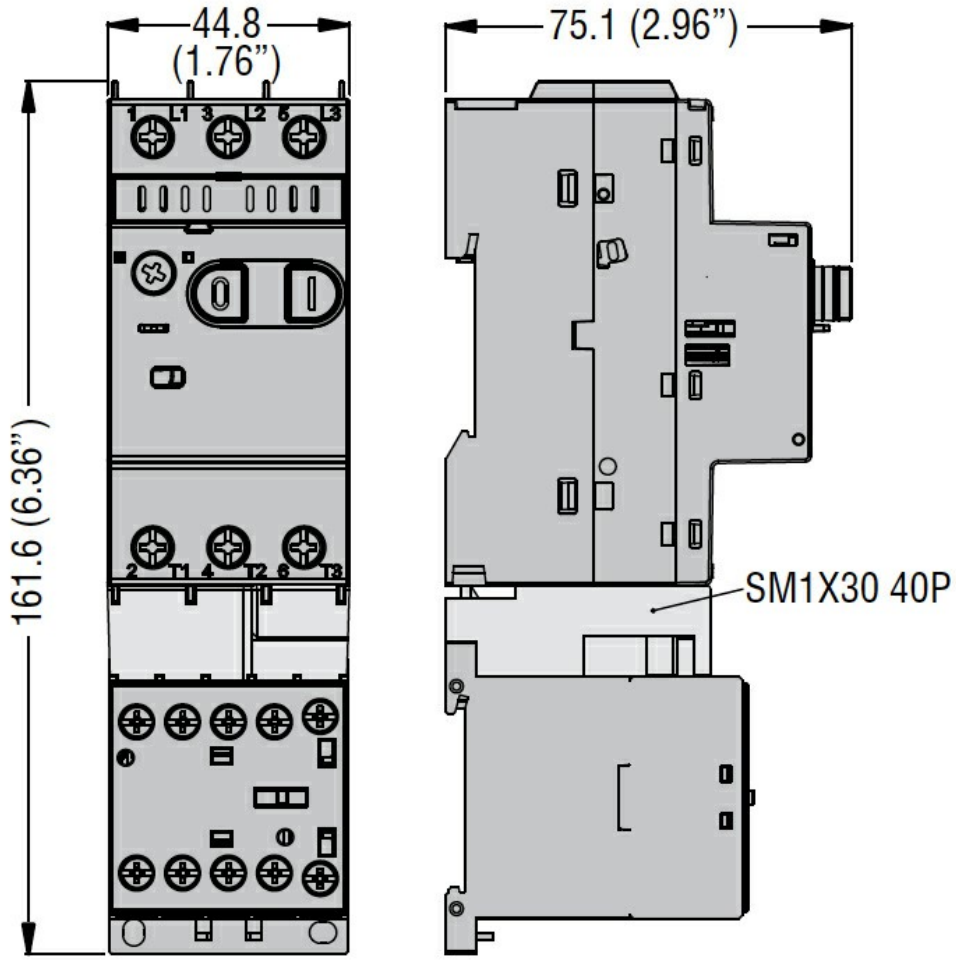

Certifications and compliance

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding