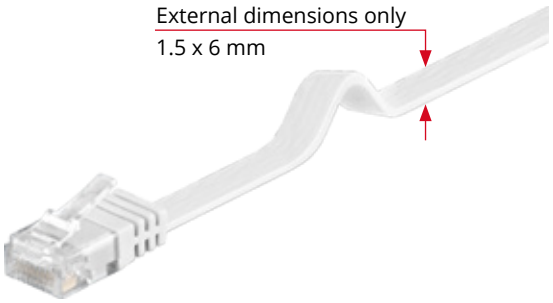

Outer sheath material	PVC
height of cable sheath	1.5 mm
width of cable sheath	6 mm
max. bandwidth	100 MHz
Cable type	flat cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	30/7 (stranded)
Shielding class	U/UTP
Connection, type	RJ45 male (8P8C)
Connection, shielding	no
Latch protection	no

Goobay

CAT 5e flat-patch cable U/UTP, white

CCA

- unshielded flat LAN/network cable to connect network components with 2 x RJ45 connectors
- extreme flexible, small bending radius
- OD only 1.5 x 6 mm
- gold plated contacts (PINs)
- short connector type without latch protection
- slimline strain relief
- pair-sequence acc. to EIA/TIA 568B

Cable length	Bulk
0.50 m	93357
1.00 m	93358
1.50 m	95191
2.00 m	93359
3.00 m	93360
5.00 m	93361
7.00 m	93362
10.00 m	93363
15.00 m	93364
20.00 m	93365



Outer sheath material	PVC
Cable sheath diameter (approx.)	5.4 mm
max. bandwidth	100 MHz
Cable type	round cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	26/7 (stranded)
Shielding class	F/UTP
Number of shieldings	1 x
Type 1, shielding	foil (aluminum)
Connection, type	RJ45 male 90° (8P8C)
Connection, shielding	yes
Latch protection	no

Goobay

CAT 5e patchcable 2x 90°angled, F/UTP

CCA, 2x RJ45 male 90° (8P8C)

- shielded LAN/network cable to connect network components with 2 x RJ45 connectors
- ideal solution with minimal space
- outer shield: foil screening
- with 3µ gold plated PINs
- slimline strain relief
- without latch protection
- pair-sequence acc. to EIA/TIA 568B





Cable length	black	white
	Bulk	Bulk
0.25 m	96076	96060
0.50 m	96077	96061
1.00 m	96078	96062
2.00 m	96079	96063
3.00 m	96080	96064
5.00 m	96081	96065
10.00 m	96082	96066
15.00 m	96083	96067

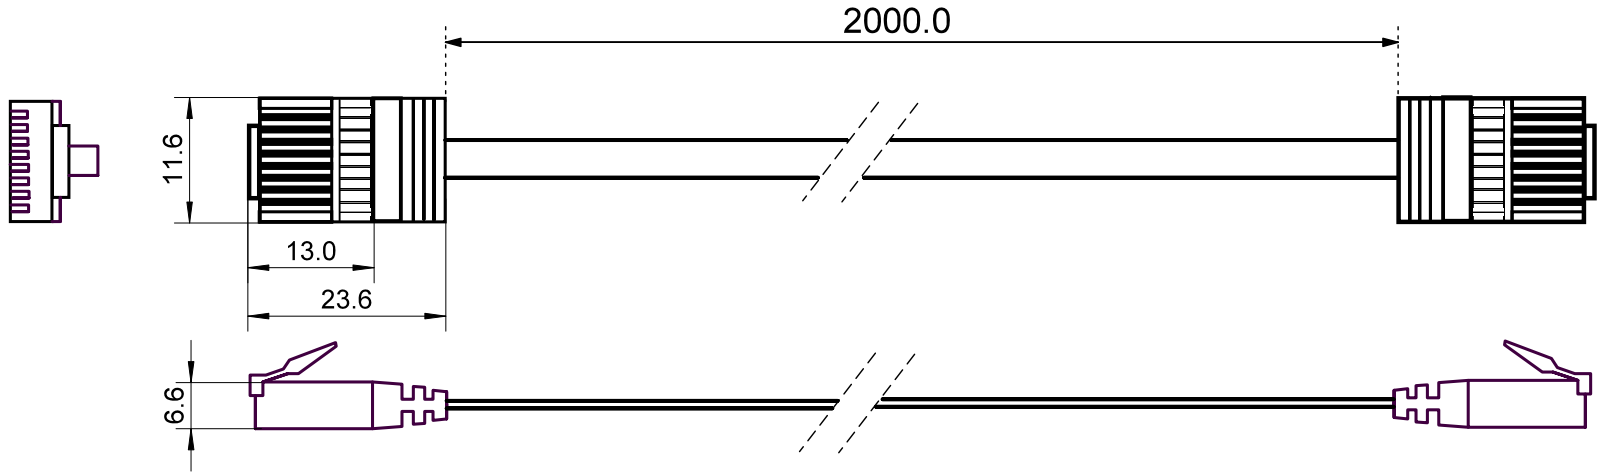



- CAT 5e Netzwerkkabel; Lose Ware
- 2xRJ45 St.; UNGESCHIRMT
- Paarfolge nach EIA/TIA 568
- Innenleiter 4 x 2 x AWG 26/7 CU
- mit angespritzter Knickschutztülle
- ungeschirmtes Twisted Pair Kabel
- Längenangabe auf der Tülle
- mit vergoldeten Kontaktflächen
- Slimline Knickschutztülle, geeignet für alle Patchfelder
- Flachkabel
- RoHS-konform

- CAT 5e Network cable; bulk
- 2xRJ45 plugs; UNSCREENED
- pair-sequence acc. to EIA/TIA 568
- inner conductor 4 x 2 x AWG 26/7 CU
- molded version with strain relief
- unscreened twisted pair cable
- with length indication on the strain relief
- with gold plated contacts
- slim line strain relief, suitable for all patch panel
- flat cable
- RoHS-compliant

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	05.11.2008	IK	CAT FLAT 5-200 WHITE	
23.06.2009	li	gepr.:	05.11.2008	li		
04.08.2011	tf	Norm:			Zeichnungs-Nr.: 93359	von

wentronic