


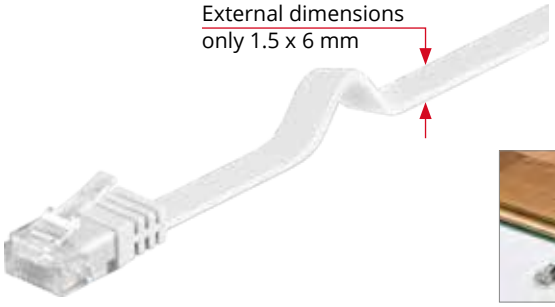


Material cable sheath	PVC
height of cable sheath	1.5 mm
width of cable sheath	6 mm
max. bandwidth	100 MHz
Cable type	flat cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	30/7 (stranded)
Shielding class	U/UTP
Connection, type	RJ45 male (8P8C)
Connection, shielding	no
Latch protection	no

Goobay

CAT 5e flat-patch cable U/UTP, white

CCA

- unshielded flat LAN/network cable to connect network components with 2 x RJ45 connectors
- extreme flexible, small bending radius
- OD only 1.5 x 6 mm
- gold plated contacts (PINs)
- short connector type without latch protection
- slimline strain relief
- pair-sequence acc. to EIA/TIA 568B



Cable length	Bulk
0.50 m	93357
1.00 m	93358
1.50 m	95191
2.00 m	93359
3.00 m	93360
5.00 m	93361
7.00 m	93362
10.00 m	93363
15.00 m	93364
20.00 m	93365



Material cable sheath	PVC
Cable sheath diameter (approx.)	5.4 mm
max. bandwidth	100 MHz
Cable type	round cable
Inner conductor material	CCA (copper-clad aluminium)
AWG	26/7 (stranded)
Shielding class	F/UTP
Number of shieldings	1 x
Type 1, shielding	foil (aluminum)
Connection, type	RJ45 male 90° (8P8C)
Connection, shielding	yes
Latch protection	no





Goobay

CAT 5e patchcable 2x 90°angled, F/UTP

CCA

- shielded LAN/network cable to connect network components with 2 x RJ45 connectors
- ideal solution with minimal space
- outer shield: foil screening
- with 3µ gold plated PINs
- slimline strain relief
- without latch protection
- pair-sequence acc. to EIA/TIA 568B



Cable length	black	white
	Bulk	Bulk
0.25 m	96076	96060
0.50 m	96077	96061
1.00 m	96078	96062
2.00 m	96079	96063
3.00 m	96080	96064
5.00 m	96081	96065
10.00 m	96082	96066
15.00 m	96083	96067