Product Data Sheet

GW40503

40 CDE




Obudowa w standardzie francuskim do montażu naściennego wyposażona w wielobiegunowe listwy zaciskowe. Ściany z elementami wybijanymi.

Klasa Izolacji	II	Kolor	Biały RAL 9016
Śred. zewn. LxHxD (mm)	250x475x93.5	Ochrona IP	IP30
Montaż	Montaż naścienny	Odporność na wstrząsy	IK07
Liczba modułów EN 50022	39 (13x3)	Próba rozżarzonym drutem	750 °C
Norma	IEC EN 60670-1; IEC EN 60670-24; NF C 61-910	Temperatura robocza	-25 +60 °C
Twardość kulkowa	70 °C	Blok zaciskowy przewodu fazowego (mm²)	N(1x35)+(5x25)
Blok zaciskowy przewodu zerowego (mm²)	N(1x35)+(5x25)	Blok zaciskowy przewodu uziemiającego (mm²)	E(7x25)+(36x4)

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

DIMENSIONAL

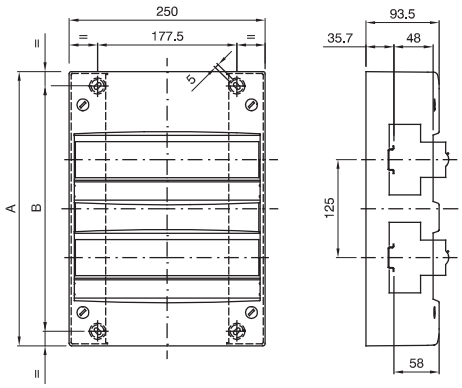

	Codice	A	B
13M	**GW 40 501**	225	188
26M	**GW 40 502**	350	313
39M	**GW 40 503**	475	438
52M	**GW 40 504**	600	563

TECHNICAL SYMBOLOGY



II

IP


IP30

IK


IK07

GWT

750 °C



-25 +60 °C



70 °C

STANDARDS/APPROVALS

GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 21/11/2025

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice