LED outdoor light without sensor

L 271 digi C

without motion detector, with Bluetooth
EAN 4007841 068714
Article number 068714



LED
36 years (Ø 4,5h / day)

outdoor light

connectable via bluetooth

3000 K
3000K warm-white

IP44

CE

energy saving

Light source not exchangeable

Control gear not exchangeable

CE

Function description

The modern outdoor light L 271 digi C from the STEINEL Connect series can be networked extremely quickly via Bluetooth – while also leaving a well-balanced impression around the building. Settings are conveniently made via app. In addition, the outdoor light has an attractive look. The LED outdoor light is equipped with 566 lm, a power consumption of 6,6 W and 3000 K warm white light. The whole product family is finished in high-quality aluminium. With the LED outdoor light L 271 digi SC, a version with sensor is also available.

Technical specifications

Dimensions (L x W x H)	65 x 116 x 235 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
With remote control	No
Version	without motion detector, with Bluetooth
PU1, EAN	4007841068714
Application, place	Outdoors
Application, room	garden, front door, all round the building, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II

Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	6,6 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Luminous flux total product	566 lm
Measured luminos flux (360°)	566 lm
Total product efficiency	85 lm/W
Colour temperature	3000 K
Lamp	LED cannot be replaced
Continuous light	selectable
Interconnection	Yes
Interconnection via	Bluetooth Mesh Connect
Colour Rendering Index CRI	= 82
Product category	LED outdoor light without sensor

LED outdoor light without sensor

L 271 digi C

without motion detector, with Bluetooth
EAN 4007841 068714
Article number 068714

Technical specifications

Ambient temperature	from -10 up to 40 °C

Dimension Drawing

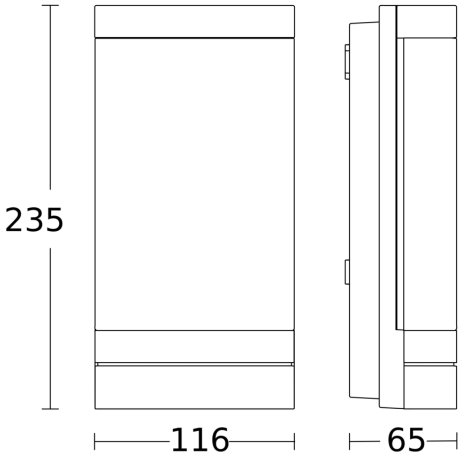

Circuit diagram Bluetooth

