
EXS3032

TRÓJFAZOWY ELEKTRONICZNY PRZEKŁADNIK PRĄDOWY, 32A, Z PRZEWODEM RJ45 O DŁUGOŚCI 2M



Przeznaczenie produktu			Elektroniczne przetworniki prądu do systemu EASY BRANCH
Seria produktu			EXS3032
Typ			3F
Wejścia prądowe			
Prąd znamionowy (Ie)		A	32
Prąd			
Maksymalny wg IEC (Imax)		A	32
znamionowy wg IEC (Iref-Ib)		A	5
Rozruchu wg IEC (Ist)		mA	10
Izolacja			
Znamionowe napięcie izolacji Ui IEC/EN		V	600
Właściwości mechaniczne			
Materiał obudowy			Poliamid
Typ zacisków			RJ45
Masa		g	140
Warunki otoczenia			
Temperatura			
	Temperatura pracy		
	min.	°C	-30
	maks.	°C	+70
	Temperatura składowania		
	min.	°C	-30
	maks.	°C	+80
Wilgotność względna		%	<80
Maksymalny stopień zanieczyszczenia			2
Kategoria przepięciowa			3
Stopień ochrony			IP20

Wymiary

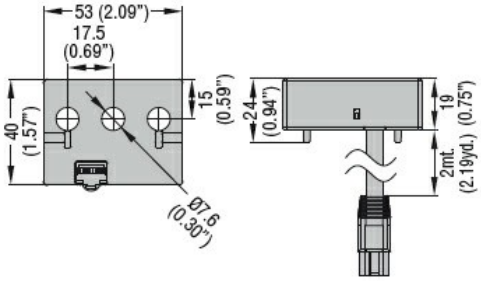

Certyfikaty i zgodność

Zgodność

- IEC/EN/BS 61000-6-2
- IEC/EN/BS 61000-6-4
- IEC/EN/BS 61010-1

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certyfikaty

CE
cETLus
EAC
UKCA

Klasyfikacja ETIM

ETIM 8,0	EC002475 - Przetwornik prądowy

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding