PATRZ KARTA - Z-LHASA/230




Wyzwalacz wzrostowy, do 125A, 110-415V, 1.5JC

Typ	**Z-LHASA/230**
Catalog No.	**248442**
Eaton Catalog No.	**Z-LHASA/230**

Powering Business Worldwide™

Program dostaw

Funkcja podstawowa			Akcesoria do wyłącznika ochronnego
Funkcja podstawowa – akcesoria			Wyzwalacz wzrostowy
Aplikacja			Aparaty łączeniowe do zastosowań w przemyśle i budynkach funkcjonalnych
Asortyment			Akcesoria
Side mounting			for fitting on left to: AZ
Diagram łączenia			

Świadectwo typu zgodnie z IEC/EN 61439

Dane techniczne dla zaświadczenia rodzaju konstrukcji			
Robocza temperatura otoczenia min.		°C	-5
Robocza temperatura otoczenia maks.		°C	40


Dane techniczne zgodne z ETIM 6.0

Devices for distribution board-/surface mounting (EG000062) / Auxiliary contact unit for distribution board (EC001286)

Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ecl@ss8.1-27-14-35-02 [AKE327010])

Device fitting			Miniature circuit breaker (MCB)
Additional equipment			Shunt release (for power circuit breaker)
Attached at delivery			No
Assembly width (TE)			1.5
Number of normally open contacts			0
Number of normally closed contacts			0
Number of change-over contacts			0
Number of fault-signal switches			0
Rated switch current		A	2
Nominal rated voltage		V	230
Control voltage type			AC
With autotest for earth leakage function			No
Suitable for max. number of poles main contact unit (total)			1
Suitable for max. current main contact unit		A	2

Wymiary

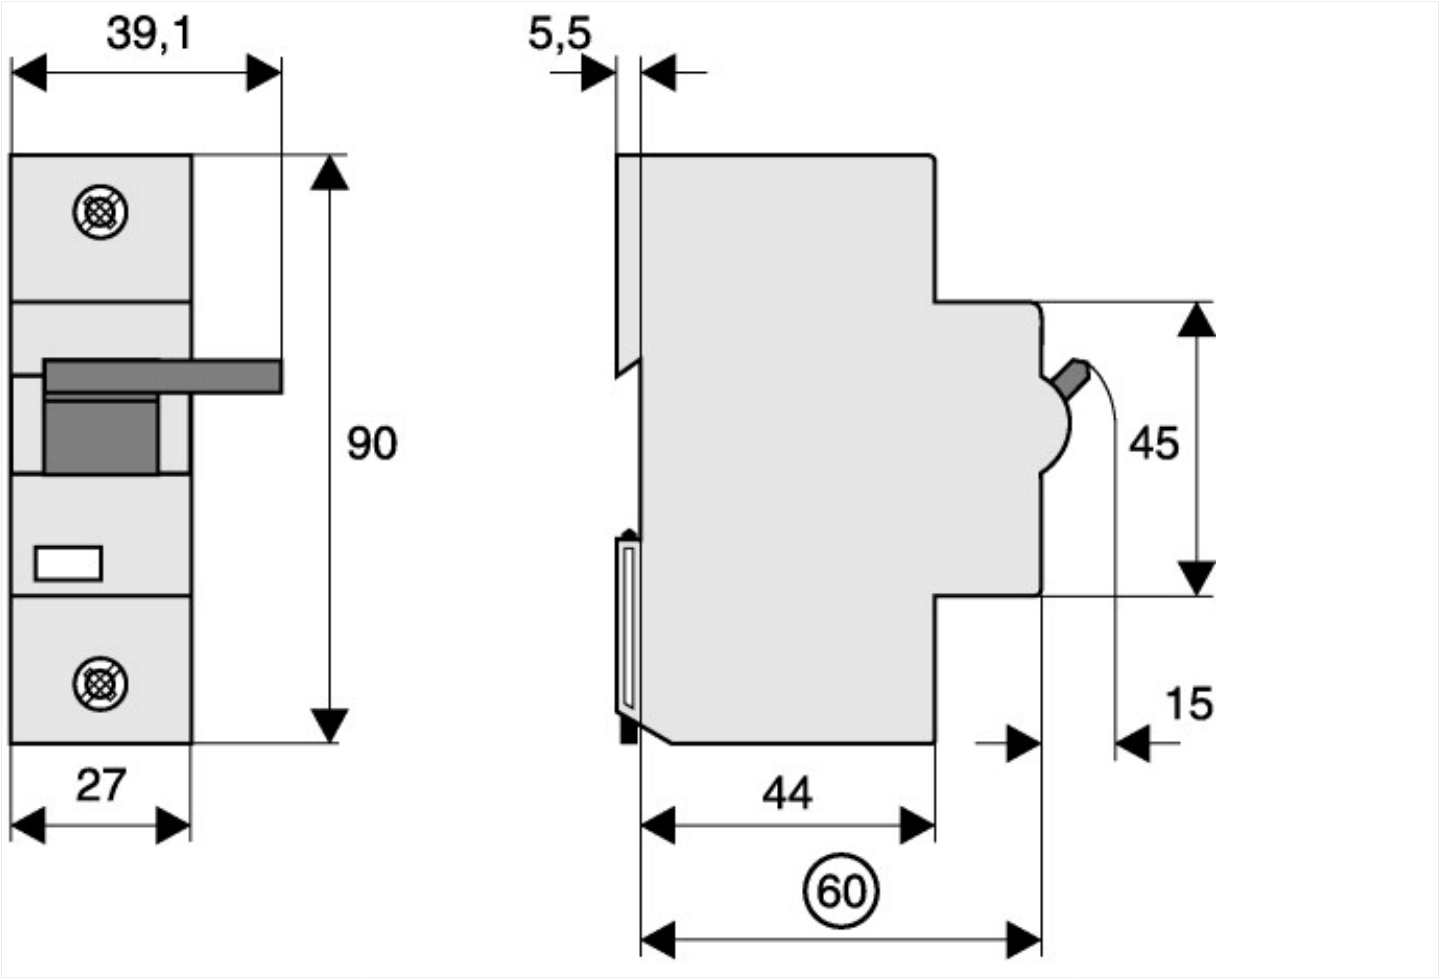

© 02/2018 by Eaton Industries GmbH