HARTING Electronics GmbH
D-32339 Espelkamp
info@HARTING.com

Deutsch

ix Industrial® Removal Tool


Bestell-Nummer
09458000182

www.HARTING.com


Montageanleitung

Demontagewerkzeug, für HARTING ix Industrial® als Ausziehhilfe für dicht gesteckte ix Industrial® Steckverbinder.




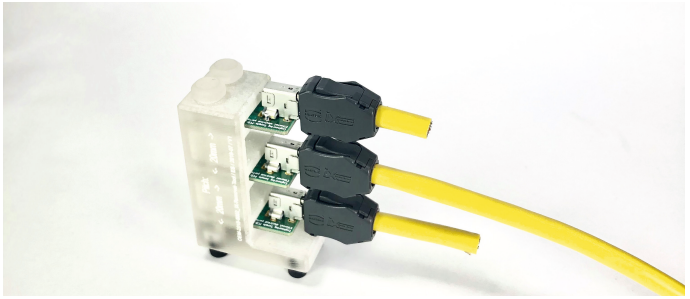


1. Schiebe das ix Industrial® Removal Tool (Ausziehwerkzeug) über den Steckverbinder bis zum Anschlag der Ausprägung im Werkzeug.

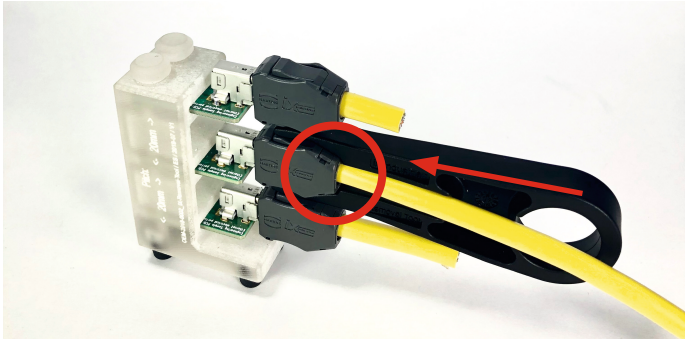

2. Drücke das Kabel mit dem Finger gegen das Ausziehwerkzeug.

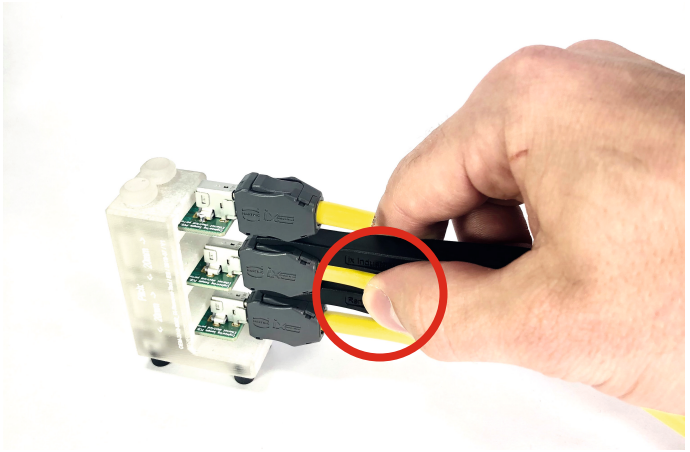

3. Ziehe den Steckverbinder aus der Buchse.

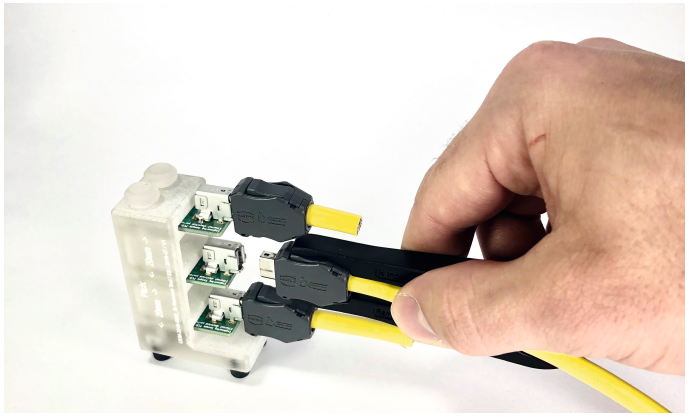

Mehr erfahren über ix Industrial®? Dann besuchen Sie unseren eShop.



Bestell-Nummer: 09 45 800 0182 / 99.00

Version 1.0 - 2020 - 02

Irrtum und technische Änderungen vorbehalten.

HARTING	**HARTING Electronics GmbH** D-32339 Espelkamp info@HARTING.com	**English**

ix Industrial® Removal Tool


Order number
09458000182

www.HARTING.com


Assembly instruction

Removal tool, for HARTING ix Industrial® as pull-out aid for close-fitting ix Industrial® connectors.




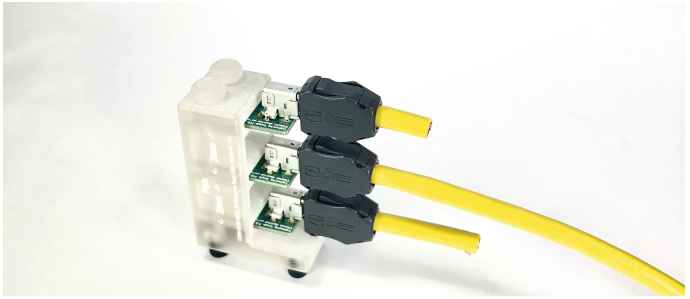


1. Slide the ix Industrial® Removal Tool over the connector until stop.

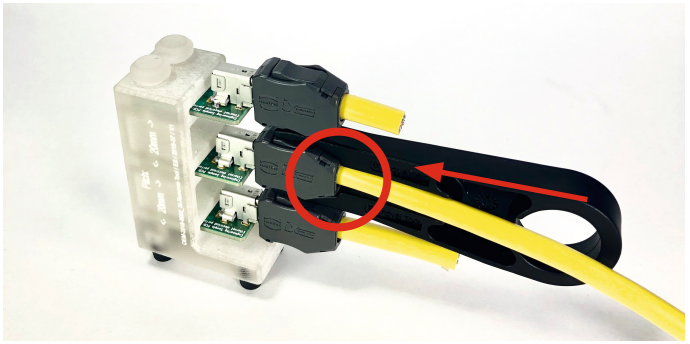

2. Grab the cable with a finger and press it against the removal tool.

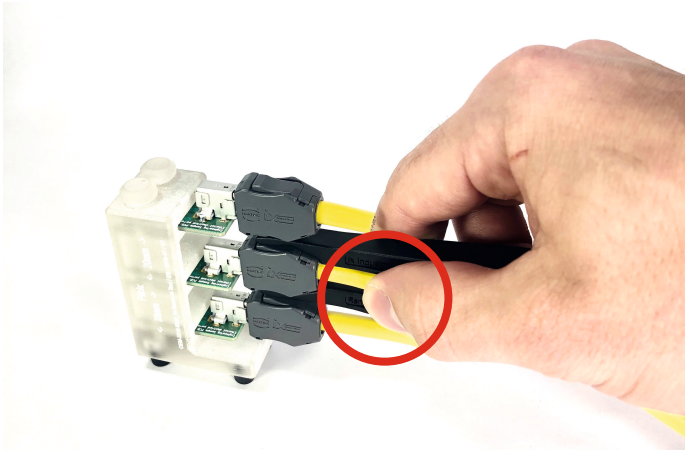

3. Pull out the connector.

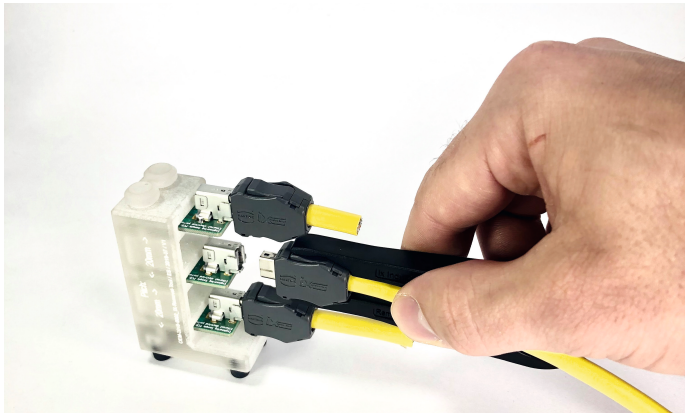

Learn more about ix Industrial®? Then visit our eShop.



Order number: 09 45 800 0182 / 99.00

Version 1.0 - 2020 - 02

Errors and technical changes reserved.