SIEMENS

Data sheet 3TH43 46-0AP0

CONTACTOR RELAY 73E EN 50 011 7NO+3NC, 1 OVERLAP CONTACT SCREW TERMINALS AC OPERATION AC 230/220V 50HZ, 276/264V 60HZ



Figure similar

General technical data:	
Size of contactor	0
Ambient temperature during operation	-25 ... +55 °C
Protection class IP on the front	IP20
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Equipment marking acc. to DIN EN 61346-2	K
Equipment marking acc. to DIN EN 81346-2	K

Control circuit/ Control:	
Type of voltage of the control supply voltage	AC
Control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
Control supply voltage	
• at AC	
— at 50 Hz	
— rated value	230 V
— at 60 Hz	

Changes preserved
© Copyright Siemens AG

— rated value	277 V

Auxiliary circuit:	
Operating current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	6 A
Identification number and letter for switching elements	73 E, 1U
Number of NC contacts for auxiliary contacts	2
• lagging switching	1
• delayed switching	0
• make-before-break switching	1
Number of NO contacts for auxiliary contacts	6
• delayed switching	0
• leading contact	1
• make-before-break switching	1
Number of CO contacts for auxiliary contacts	0

Connections/ Terminals:	
Type of electrical connection for auxiliary and control current circuit	screw-type terminals

Mechanical data:	
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Width	55 mm
Height	78 mm
Depth	102 mm

Certificates/approvals

Changes preserved
© Copyright Siemens AG

General Product Approval				Declaration of Conformity	Test Certificates
CCC	CSA	UL	EAC	EG-Konf.	Typprüfbescheinigung/Werkszeugnis

Test Certificates		Shipping Approval			
spezielle Prüfbescheinigungen	sonstig	DNV	GL	LRS	RMRS

other	
Umweltbestätigung	sonstig

Safety related data:	
Protection against electrical shock	finger-safe
B10 value with high demand rate acc. to SN 31920	1 000 000
• Note	With 0.3 x Ie
T1 value for proof test interval or service life acc. to IEC 61508	20 y

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH43460AP0


Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH43460AP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3TH43460AP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH43460AP0&lang=en

Changes preserved
© Copyright Siemens AG



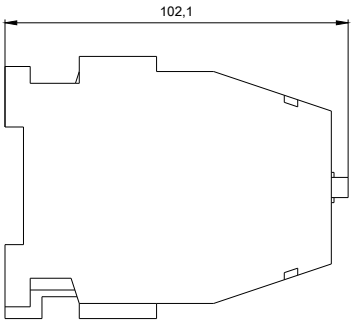

\W9.4414;
\W9.2517; 3TH4391-0AL2_ALL

last modified: 23.11.2015

Changes preserved
© Copyright Siemens AG