

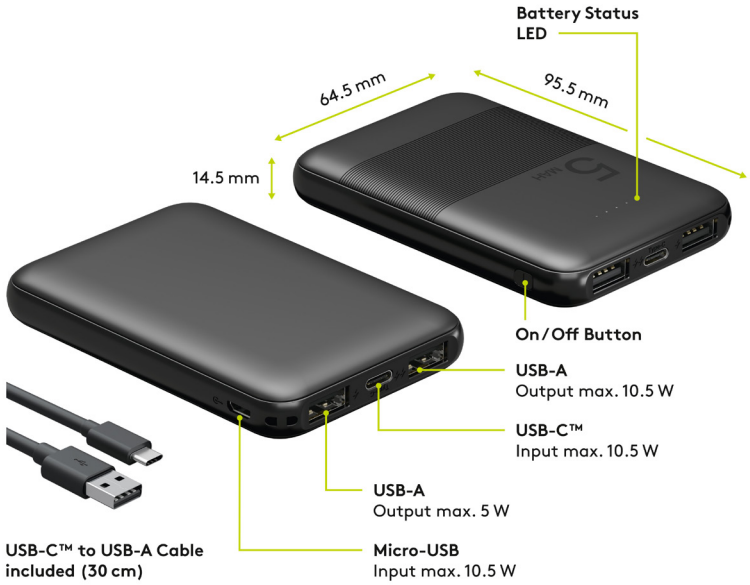

Powerbank kompakt 5.000 mAh

- zum Laden von bis zu zwei Geräten gleichzeitig
- integrierter Schutz gegen Überladungsspannung, Tiefentladespannung Überlastung und Kurzschlüss
- Akkustand kann über eine LED-Anzeige abgerufen werden
- Ladekabel im Lieferumfang enthalten

Anschlüsse (Eingänge):	Micro-USB-2.0-Buchse (Typ B), USB-C™-Buchse
Anschlüsse (Ausgänge):	USB-A-Buchse, USB-A-QC-3.0-Buchse
Spannung/Stomstärke (Eingang):	5 V ⎓, 2,1 A
Spannung/Stromstärke (Ausgang):	USB-A: 5 V ⎓, 1 A
	USB-A-QC-3.0: 5 V ⎓, 2,1 A
	Gesamt: 5 V ⎓, 2,1 A max.
Akku:	Lithium-Polymer, 3,7 V ⎓, 5000 mAh, 18,5 Wh
Gewicht:	120 g
Schutzart:	IP20
Betriebstemperatur:	0 °C ~ +45 °C
Lagertemperatur:	-5 °C ~ +45 °C

Ladekabel

Anschlüsse:	USB-C™-Stecker, USB-A-Stecker
Kabellänge:	30 cm
Gewicht:	10 g

Power Bank compact 5.000 mAh

- *for charging up to two devices simultaneously*
- *integrated protection against overcharge voltage, overdischarge voltage, overload and short circuit*
- *battery status can be checked via LED indicators*
- *charging cable included in the scope of delivery*

Connections (inputs):	*Micro USB 2.0 socket (Type B), USB-C™ socket*
Connections (outputs):	*USB-A socket, USB-A QC 3.0 socket*
Voltage/current (input):	*5 V ⎓, 2.1 A*
Voltage/current (output):	*USB A: 5 V ⎓, 1 A*
	USB A QC 3.0: 5 V ⎓, 2.1 A
	Total: 5 V ⎓, 2.1 A max.
Battery:	*Lithium polymer, 3.7 V ⎓, 5000 mAh, 18.5 Wh*
Weight:	*120 g*
Protection level:	*IP20*
Operating temperature:	*0 °C ~ +45 °C*
Storage temperature:	*-5 °C ~ +45 °C*

Charging cable

Connections:	*USB-C™ plug, USB-A plug*
Cable length:	*30 cm*
Weight:	*10 g*

Änderungen			Datum	Name
Datum	Name	gez.:	23.12.2021	aw
		gepr.:	23.12.2021	aw
		Norm:		
		Änderungen vorbehalten / *Subject to change*		

Bezeichnung: PowerBank 5000mAh compact

Blatt: 1/1

Zeichnungs-Nr.: 53932

von