
294

For Connecting Lighting and Equipment Anywhere in the World

Contact Technology:

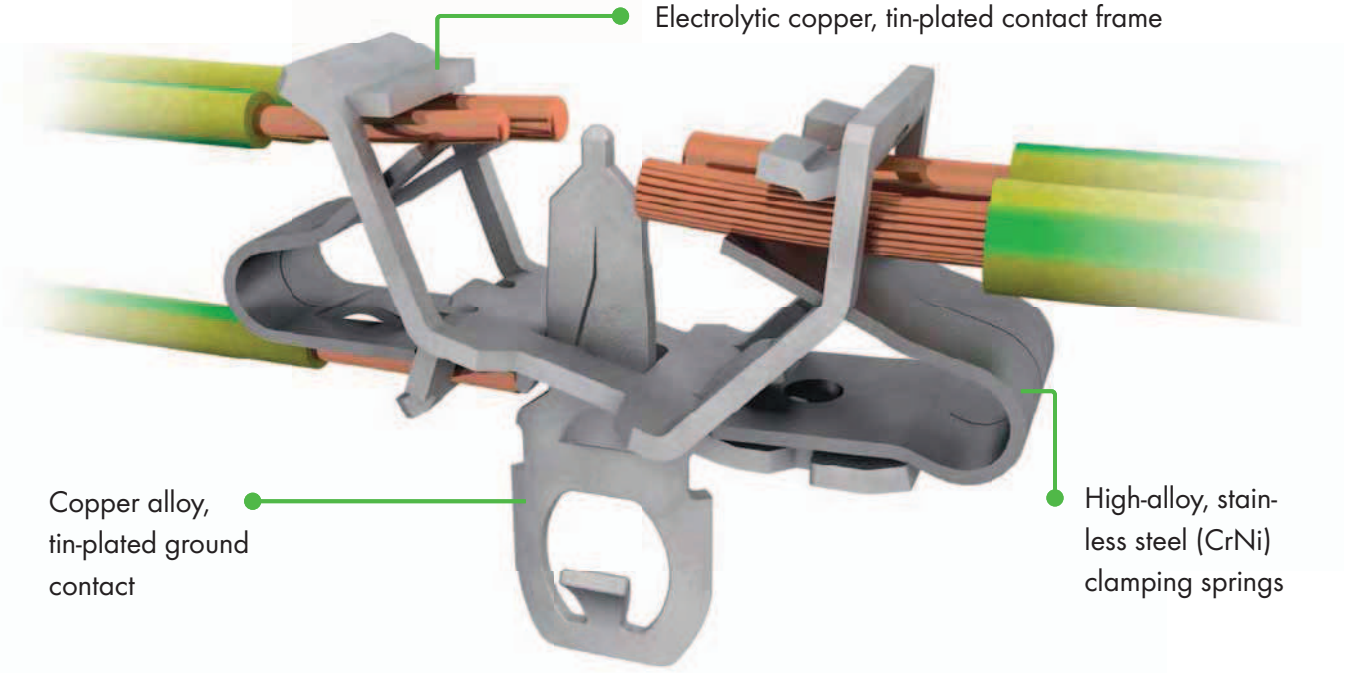


Internal connection:
PUSH WIRE® for internal wiring with solid conductors.

EUROPE
1 x 0.5 - 2.5 mm² "s"
1 x 0.5 - 1.5 mm² "s"
1 x 0.5 - 0.75 mm² "s"
AMERIKA
1 x AWG 18 - 14 "s"
1 x AWG 18 - 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 - 1,6 mm Ø "s"
1 x 0.8 - 1 mm Ø "s"
1 x 0.8 mm Ø "s"

External connection:
CAGE CLAMP®S for power supply connections for all conductor types.

EUROPE
2 x 0.5 - 2.5 mm² "sol., str., f-str."
AMERIKA
2 x AWG 18 - 12 "s"
2 x AWG 18 - 14 "str., f-str."
JAPAN
2 x 0.8 - 2 mm Ø "s"
2 x 0.5 - 2 mm² "str., f-str."

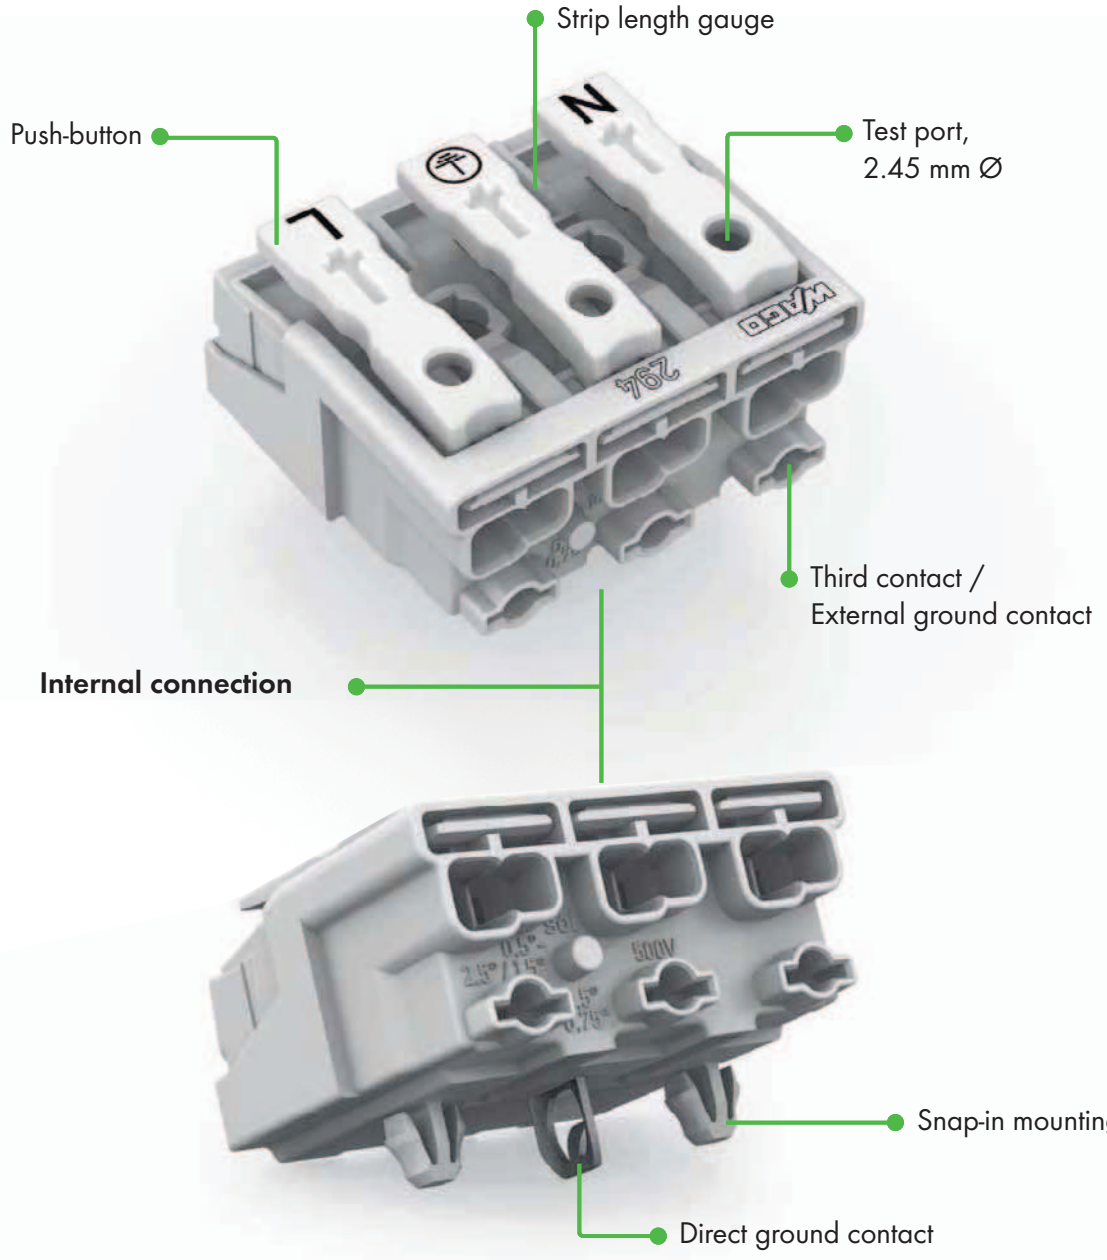
Strip length gauge
Push-button
Test port,
2.45 mm Ø
Third contact /
External ground contact
Internal connection
Snap-in mounting foot
Direct ground contact

Power Supply Connectors With Two Snap-In Mounting Feet
294 Series



Without Ground Contact	With Direct Ground Contact	With Screw-Type Ground Contact	With Snap-In Ground Contact	With Angled Snap-In Ground Contact
				

Pole No.	Marking	Item No.	Item No.	Item No.	Item No.	Item No.
2 	without	294-5002	– – –	– – –	– – –	– – –
	N L	294-5012	– – –	– – –	– – –	– – –
	N' L'	294-5022	– – –	– – –	– – –	– – –
	DA- DA+	294-5032	– – –	– – –	– – –	– – –
	- +	294-5072	– – –	– – –	– – –	– – –
	1 N	294-5052	– – –	– – –	– – –	– – –
	2 1	294-5042	– – –	– – –	– – –	– – –
3 	without	294-5003	– – –	– – –	– – –	– – –
	N ⏚ L	294-5013	294-5113	294-5413	294-5213	294-5313
	N' ⏚ L'	294-5023	294-5123	294-5423	294-5223	294-5323
	1 ⏚ N	294-5053	294-5153	294-5453	294-5253	294-5353
	3 2 1	294-5043	– – –	– – –	– – –	– – –
4 	without	294-5004	– – –	– – –	– – –	– – –
	1/L' 2/L ⏚ N	294-5024	294-5124	294-5424	294-5224	294-5324
	1 2 ⏚ N	294-5014	294-5114	294-5414	294-5214	294-5314
	4 3 2 1	294-5044	– – –	– – –	– – –	– – –
5 	without	294-5005	– – –	– – –	– – –	– – –
	L3 L2 L1 ⏚ N	294-5015	– – –	294-5415	294-5215	294-5315
	L' N' L ⏚ N	294-5025	– – –	294-5425	294-5225	294-5325
	DA+ DA- L ⏚ N	294-5035	– – –	294-5435	294-5235	294-5335
	DA- N ⏚ L DA+	294-5075	294-5175	294-5475	294-5275	294-5375
	3 N ⏚ 1 2	294-5055	294-5155	294-5455	294-5255	294-5355
	5 4 3 2 1	294-5045	– – –	– – –	– – –	– – –

Item numbers marked in blue are for stock items.

Power Supply Connectors Without Snap-In Mounting Feet
294 Series



Without Ground Contact	With Direct Ground Contact	With Screw-Type Ground Contact	With Snap-In Ground Contact	With Angled Snap-In Ground Contact
				

Pole No.	Marking	Item No.	Item No.	Item No.	Item No.	Item No.
2 	without	294-4002	– – –	– – –	– – –	– – –
	N L	294-4012	– – –	– – –	– – –	– – –
	N' L'	294-4022	– – –	– – –	– – –	– – –
	DA- DA+	294-4032	– – –	– – –	– – –	– – –
	- +	294-4072	– – –	– – –	– – –	– – –
	1 N	294-4052	– – –	– – –	– – –	– – –
	2 1	294-4042	– – –	– – –	– – –	– – –
3 	without	294-4003	– – –	– – –	– – –	– – –
	N ⏚ L	294-4013	– – –	294-4413	294-4213	294-4313
	N' ⏚ L'	294-4023	– – –	294-4423	294-4223	294-4323
	1 ⏚ N	294-4053	– – –	294-4453	294-4253	294-4353
	3 2 1	294-4043	– – –	– – –	– – –	– – –
4 	without	294-4004	– – –	– – –	– – –	– – –
	1/L' 2/L ⏚ N	294-4024	– – –	294-4424	294-4224	294-4324
	1 2 ⏚ N	294-4014	– – –	294-4414	294-4214	294-4314
	4 3 2 1	294-4044	– – –	– – –	– – –	– – –
5 	without	294-4005	– – –	– – –	– – –	– – –
	L3 L2 L1 ⏚ N	294-4015	– – –	294-4415	294-4215	294-4315
	L' N' L ⏚ N	294-4025	– – –	294-4425	294-4225	294-4325
	DA+ DA- L ⏚ N	294-4035	– – –	294-4435	294-4235	294-4335
	DA- N ⏚ L DA+	294-4075	– – –	294-4475	294-4275	294-4375
	3 N ⏚ 1 2	294-4055	– – –	294-4455	294-4255	294-4355
	5 4 3 2 1	294-4045	– – –	– – –	– – –	– – –
6 	without	294-4006	– – –	– – –	– – –	– – –
7 	without	294-4007	– – –	– – –	– – –	– – –