SIEMENS

Data sheet 3RV1915-5A



3-PHASE LINE-SIDE TERMINAL 3-PHASE LINE-SIDE TERMINAL, FOR 3-PHASE BUSBARS, FOR SIZE S0 AND S00, CONNECTION FROM ABOVE, PIN-TYPE CONNECTIONS

General technical data:		
product brand name		SIRIUS
Product designation		Three-phase feeder terminal
Size of the circuit-breaker		S00, S0
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 Rated value	V	690
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	63

Installation/ mounting/ dimensions:		
Width	mm	44
Height	mm	24
Depth	mm	25

Connections/ Terminals:		
Type of electrical connection for main current circuit		screw-type terminals
Type of connectable conductor cross-section		
• for main contacts		
— solid		1x (2.5 ... 25 mm²)
— stranded		1x (2.5 ... 25 mm²)
— finely stranded		
— with core end processing		1x (4 ... 16 mm²)
• for AWG conductors for main contacts		1x (12 ... 4)

Changes preserved
© Copyright Siemens AG

Certificates/ approvals:

Certificate of suitability CE / UL / CSA / CCC

General Product Approval		Declaration of Conformity	Test Certificates	Shipping Approval	
CSA	UL	EG-Konf.	Special Test Certificate	BUREAU VERITAS	DNV

Shipping Approval		other			
PRS	RMRS	Declaration of Conformity	Confirmation	Environmental Confirmations	VDE

other

other

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system)
http://www.siemens.com/industrymall


Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV19155A

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RV19155A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV19155A&lang=en

Changes preserved
© Copyright Siemens AG



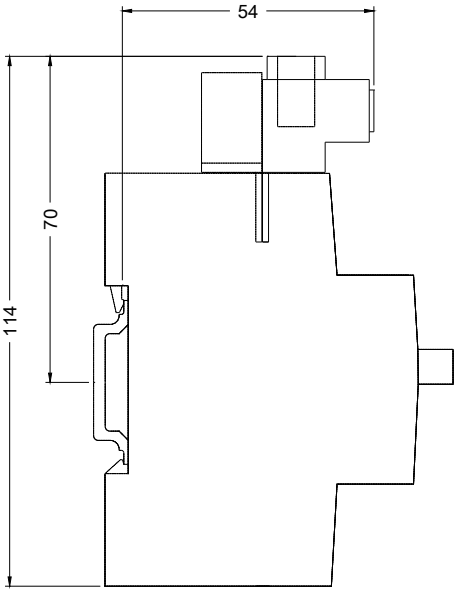

last modified: 20.04.2015

Changes preserved
© Copyright Siemens AG