SIEMENS

Data sheet 5SG7631-0KK16

MINIZED-SWITCH-DISCONNECTOR D01 16A 400V
3P FOR FUSE-LINKS 2-16A



Model		
product brand name		SENTRON
Product designation		MINIZED fuse switch disconnectors
Design of the product		as draw-out assembly
General technical data		
Number of poles		3
Size of fuse system / acc. to DIN EN 60269-1		D01
Overvoltage category		4
Voltage		
Surge voltage resistance / rated value	kV	6
Protection class		
Protection class IP		IP20, with connected conductors
Electricity		
Current / at AC / rated value	A	16
Main circuit		
Operating voltage / at AC / rated value	V	400

Changes preserved
© Copyright Siemens AG

Product details		
Product feature / sealable		Yes

Connections		
Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3

Mechanical Design		
Height	mm	70
Width	mm	54
Depth	mm	88
Mounting position		any, preferably vertical
Net weight	g	203

Certificates		
Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F

General Product Approval	Declaration of Conformity

VDE EAC EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SG76310KK16


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5SG76310KK16/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SG76310KK16

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://ausschreibungstexte.siemens.com/tiplv

Changes preserved
© Copyright Siemens AG

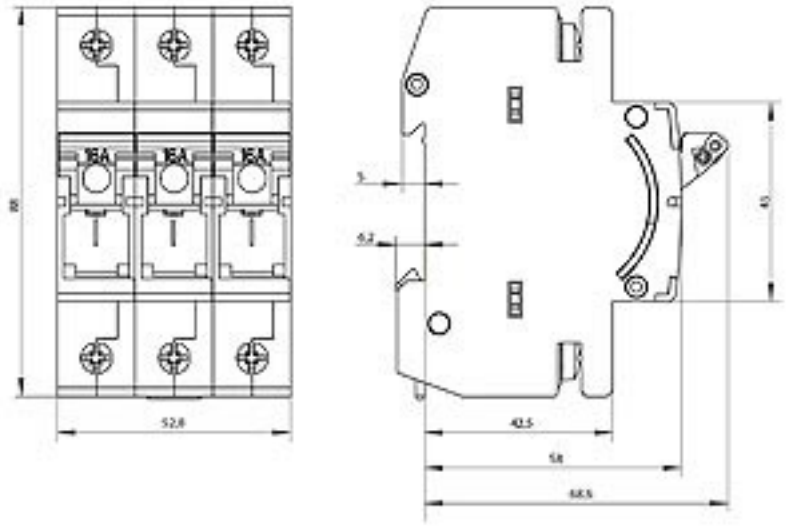

last modified: 12.04.2016

Changes preserved
© Copyright Siemens AG