Ultra Installation System

Ultra-efficient installation solutions

Cable Management System



Schneider Electric

Efficient use of time and money is good for you, and good for your customers.



Ultra installation system is a simple and smart installation system in environment-friendly materials.



Ultra-efficient solutions for modern buildings and homes

Ultra is a new, simple and smart installation system, covering most installation needs in an efficient way. The range includes both installation trunking, mini-trunking and skirting trunking in high-grade PVC. Ultra is the perfect and cost-efficient alternative when you need an easy-to-install system, with a limited number of references, making both ordering and handling on site very simple. If you need a complete and high-end installation solution with unlimited possibilities, our OptiLine installation system should be your choice.

All Ultra products are RoHS compliant.





Customer benefits

- Made of cadmium and lead-free high-grade PVC that is both easy to clean and resistant to impact
- Installation trunking with adaptors for Altira 45x45 module wiring devices and c/c 60 wiring devices
- Mini-trunking and skirting trunking with dedicated installation boxes and adaptors for Altira 45x45 module and c/c 60 mm wiring devices
- All Ultra products are approved by all relevant authorities
- Ultra is part of the total Schneider Electric solution for electrical distribution, network connectivity, building automation and energy efficiency









Ultra installation trunking

Ultra installation trunking is very flexible and includes adaptors for Altira wiring devices and accessories to solve all types of installation needs. Corners, bends, T-pieces, branching pieces, adaptors etc are made of halogen-free ABS. The trunking is made of self-extinguishing, cadmium and lead-free high-grade PVC, with a very good surface finish.

Ultra complies with the standards EN 50085-1 and EN 50085-2-1. The products also satisfy the provisions for CE marking according to the European Directive 2006/95/CE.

Three sizes, several possibilities

Ultra installation trunking is available in three sizes; 101x34 and 101x50 mm with one compartment, and 151x50 mm with one or two compartments (the second compartment is dedicated for network cables).

The 75 mm front opening allows 45x45 module and c/c 60 mm wiring devices to be mounted by using adaptors. The trunking base has pre-punched mounting holes every 23rd cm to make the installation fast and secure.

All sizes and all accessories have a symmetrical design to guarantee a correct installation, independent of mounting direction.



A complete trunking on one reference number
Ultra installation trunking is delivered complete on only one reference number to make ordering and handling easy. Trunking base, partition wall (151x50) and two snap-fitted front covers are included.



1 Adaptor for 1-module wiring device
2 Branching piece
3 Bend 90°
4 Adaptor for 3-module wiring devices
5 Internal corner
6 Adaptor for 2-module wiring devices
7 External corner
8 T-piece
9 Adaptor for 4-module wiring devices

Ultra is simple and fast to install. All accessories are designed for easy click-in mounting.



High safety
The trunking is IP40 and IK07 classified. It is therefore safe and impact resistant.



Click-in accessories
All accessories are designed for easy click-in mounting without tools and can be mounted after the installation of the trunking base. The picture shows the smart joint cover piece.



Adjustable corners
The corners are delivered in one piece. It is possible to cut the internal edge of the corner without interfering with the function, to perfectly fit the building construction deviations.



Protective foil
Protective foil on both sides of the trunking base and on the front covers prevents from damages. Easy to remove when the installation is finished.



Pre-punched holes
The trunking base has pre-punched oval mounting holes in two directions every 23rd cm to make the installation fast and secure.



Cable retainer
The smart cable retainer keeps all the cables in place in the trunking during the installation. Can remain in place also when the front covers are mounted and the installation is in use.



Adaptors
Adaptors for 1, 2, 3 and 4 modules of Altira 45x45 wiring devices and for c/c 60 wiring devices. The front plates overlap the trunking front, giving a neat final result.



Wiring devices for all needs
Ultra together with Altira wiring devices gives optimal function and design.

Choice guide
Installation trunking

Ultra Installation trunking

 Installation trunking including separate front cover(s)			Front cover	 Internal corner	 External corner	 Bend 90°	T-piece	 Joint cover piece, kit	
With one compartment		**Ref. No**	**Ref. No.**	**Ref. No**	**Ref. No.**	**Ref. No.**	**Ref. No.**	**Ref. No.**	
	**101x34**	ETK10134E	75 mm, ETK151505	ETK10120E	ETK10130E	ETK10140E	ETK10151E	ETK10170E	
	101x50	ETK10150E							
	151x50	ETK15150	120 mm, ETK151501	ETK15120	ETK15130	ETK15140	ETK15153	ETK15170	
	151x50	ETK151502 Without front cover							
With two compartments									
	**151x50**	ISM17010 Including partition wall	40 mm, ETK15503 75 mm, ETK151505	ETK15120	ETK15130	ETK15140	ETK15153	ETK151702	
	151x50	ETK151502 Without front cover							

	Stop end	Cable shelf	Partition wall	Cable retainer	Branching piece	Adaptors for wiring devices	
	Ref. No.	Ref. No.	Ref. No	Ref. No.	Ref. No.	Ref. No.	Ref. No.
	ETK100060E	ETK100095		ETK10171E	ETK10154E for 101x34-101x50	1-4 module adaptors, see page 15-16	
	ETK150060	ETK100092E		ETK15171	ETK15154 for 151x50-101x50		
	ETK150060	ETK100092E	ETK151504		ETK15154 for 151x50-101x50	1-4 module adaptors, see page 15-16	









Ultra mini-trunking

For wiring device adaption

Ultra mini-trunking is very suitable for minor installations in both offices and homes. Installation boxes for Altira wiring devices are easily mounted in the trunking base. Corners, bends, T-pieces, branching pieces, boxes, adaptors etc are made of halogen-free ABS. The trunking is made of self-extinguishing, cadmium and lead-free high-grade PVC, with a very good surface finish.

Ultra complies with the standards EN 50085-1 and EN 50085-2-1. The products also satisfy the provisions for CE marking according to the European Directive 2006/95/CE.

Five sizes, several possibilities

Ultra mini-trunking is available in five sizes, from 21x12 to 74x21 mm.

Installation boxes with adaptors for 45x45 module and c/c 60 mm wiring devices are available in several sizes. The trunking base has pre-punched mounting holes every 23rd cm to make the installation fast and secure.

All sizes and all accessories have a symmetrical design to guarantee a correct installation, independent of mounting direction





1 Stop end
2 Adaptor for 1-module wiring device
3 Bend 90°
4 Adaptor for 3-module wiring devices
5 Internal corner
6 Adaptor for 2-module wiring devices
7 External corner
8 T-piece

Ultra is simple and fast to install. All accessories are designed for easy click-in mounting.



High safety
The trunking is IP40 and IK07 classified. It is therefore safe and impact resistant.



Click-in accessories
All accessories are designed for easy click-in mounting without tools and can be mounted after the installation of the trunking base.



Adjustable corners
The corners are delivered in one piece and are adjustable to perfectly fit the building construction deviations.



Box kit with adaptor for wiring devices
Installation box kit, including box, wiring device adaptor and fixing screws is available on one reference number. Each box can be used for all sizes of trunking – just cut the length of the feeding section to the right size.



U-shaped cover
The cover is U-shaped and conceals the trunking base. Gives a very nice appearance and a perfect final result.



Pre-punched holes
The trunking base has pre-punched oval mounting holes every 23rd cm to make the installation fast and secure.



Self-adhesive tape
Available also with self-adhesive tape for the two smallest sizes, 21x12 and 32x17 mm. Reduces installation time significantly.



Wiring devices for all needs
Ultra together with Altira wiring devices gives optimal function and design.

Choice guide
Mini-trunking for wiring device adaption

Ultra Mini-trunking

							
Mini-trunking for wiring device adation			**Internal corner**	**External corner**	**Bend 90°**	**T-piece**	**Joint cover piece**
With one compartment		**Ref. No**	**Ref. No.**	**Ref. No.**	**Ref. No.**	**Ref. No.**	**Ref. No.**
	**21x12**	ETK21012	ETK20520	ETK20530	ETK20540	ETK20550	ETK20570
	21x12 Self-adhesive	ETK21912					
	32x17	ETK32017	ETK32020	ETK32030	ETK32040	ETK32050	ETK32070
	32x17 Self-adhesive	ETK32917					
With two compartments							
	40x17	ETK40017	ETK40020	ETK40030	ETK40040	ETK40050	ETK40070
With three compartments							
	60x21	ETK60021	ETK60020	ETK60030	ETK60040	ETK60050	ETK60070
	74x21	ETK74021	ETK74020	ETK74030	ETK74040	ETK74050	ETK74070

			 
Stop end	**Cable retainer**	**Branching piece**	**Installation box kits for wiring devices**
Ref. No.	**Ref. No.**	**Ref. No**	
ETK20560	ETK20571	for 21x12-60x21 ETK60022 for 21x12-74x21 ETK74022	Installation box kits for 1-3 module wiring devices, see page 18-19
ETK32060	ETK32071	for 32x17-60x21 ETK60032 for 32x17-74x21 ETK74032	
ETK40060	ETK40071	for 40x17-60x21 ETK60041 for 40x17-74x21 ETK74041	
ETK60060	ETK60071		
ETK74060	ETK74071		





Self-adhesive tape for shorter installation time
Self-adhesive tape makes installation easier and reduces installation time significantly. Available as an option on the smallest sizes, 16x16, 25x16 and 25x25 mm. Pre-punched holes in the trunking base allow fast permanent fixation to the wall, once the trunking base is in correct position.

Ultra mini-trunking

For cable distribution

Ultra is simple and fast to install. All accessories are designed for easy click-in mounting.

Ultra mini-trunking is very suitable for minor installations in both offices and homes. It is available in 9 sizes, from 16x16 to 60x60 mm. The smallest sizes, 16x16, 25x16 and 25x25 mm are optionally available with self-adhesive tape for faster and easier installation. Corners, bends, T-pieces, etc are made of halogen-free ABS. The trunking is made of self-extinguishing, cadmium and lead-free high-grade PVC, with a very good surface finish.



Adjustable corners
The corners are delivered in one piece and are adjustable to perfectly fit the building construction deviations.



Pre-punched holes
The trunking base has pre-punched oval mounting holes every 23rd cm to make the installation fast and secure.



Reliable snap-in
The design of the profile with accurate front cover snap-in makes it easy and fast to work with. Once snapped in, the cover tightly stays in place.

Choice guide
Mini-trunking for cable distribution

Ultra mini-trunking

								
		Internal corner	**External corner**	**Bend 90°**	**T-piece**	**Joint cover piece**	**Stop end**
Mini-trunking	**Ref. No**	**Ref. No.**	**Ref. No.**	**Ref. No.**	**Ref. No.**	**Ref. No.**	**Ref. No.**
16x16	ETK16316	ETK16320	ETK16330	ETK16340	ETK16350	ETK16370	ETK16361
16x16 Self-adhesive	ETK16916						
25x16	ETK25316	ETK25320	ETK25330	ETK25341	ETK25350	ETK25370	ETK25361
25x16 Self-adhesive	ETK25916						
25x25	ETK25325						
25x25 Self-adhesive	ETK25925						
40x16	ETK40316	ETK40320	ETK40330	ETK40341	ETK40350	ETK40370	ETK40361
40x25	ETK40325						
40x40	ETK40340						
60x25	ETK60325	ETK60320	ETK60330	ETK60341	ETK60350	ETK60370	ETK60361
60x40	ETK60340						
60x60	ETK60360						

Range
Installation trunking

Installation trunking Ultra

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Installation trunking with one compartment				
Installation trunking made up by a trunking base with one compartment and a snap-fitted 75 mm front cover. The trunking base has pre-punched mounting holes on every 23rd cm and can be provided with cable shelves. Suitable for power and low voltage cables. Supplied in 2 m lengths under protective foil. Material: PVC.				
Trunking 101x34	White RAL 9010	101/34/2000	24 m	ETK10134E
Trunking 101x50	White RAL 9010	101/50/2000	16 m	ETK10150E
Installation trunking made up by a trunking base with one compartment and a snap-fitted 120 mm front cover. The trunking base has pre-punched mounting holes on every 23rd cm and can be provided with cable shelves. Suitable for power and low voltage cables. Supplied in 2 m lengths under protective foil. Material: PVC.				
Trunking 151x50	White RAL 9010	151/50/2000	8 m	ETK15150
Installation trunking like the above but without front cover. Material: PVC.				
Trunking 151x50	White RAL 9010	151/50/2000	8 m	ETK151502
Installation trunking with two compartments				
Installation trunking made up by a trunking base with two compartments, a partition wall between the compartments and two snap-fitted front covers, one 75 mm and one 40 mm. The trunking base has pre-punched mounting holes on every 23rd cm and can be provided with cable shelves. The 75 mm front opening allows 45x45 module wiring devices and modular devices to be mounted by using adaptors. Suitable for power and low voltage cables. Supplied unassembled in 2 m lengths, with the trunking base and the front covers under separate protective foil. Material: PVC.				
Trunking 151x50	White RAL 9010	151/50/2000	8 m	ISM17010
Front cover				
Front cover to be snap-fitted in installation trunking. Supplied in 2 m lengths under protective foil. Material: PVC.				
Front cover 40 mm, 151x50	White RAL 9010	41/9/2000	48 m	ETK151503
Front cover 75 mm, 151x50	White RAL 9010	75/9/2000	16 m	ETK151505
Front cover 120 mm, 151x50	White RAL 9010	119/9/2000	16 m	ETK151501

P126982



P126983



P126225

Accessories Installation trunking Ultra

Internal corner, adjustable				
Internal corner to be snapped onto the installation trunking base. Adjustability: ±5°. Material: PC/ABS.				
Internal corner 101x34/50, adjustable	White RAL 9010	110/106/106	5	ETK10120E
Internal corner 151x50, adjustable	White RAL 9010	160/106/106	5	ETK15120
External corner, adjustable				
External corner to be snapped onto the installation trunking base. Adjustability: ±5°. Material: PC/ABS.				
External corner 101x34/50, adjustable	White RAL 9010	110/98/102	5	ETK10130E
External corner 151x50, adjustable	White RAL 9010	160/98/102	5	ETK15130
Bend, 90°				
90 degree bend to be used in junctions between horizontal and vertical applications. To be snapped onto the installation trunking base. Material: PC/ABS.				
Bend 90° 101x34/50	White RAL 9010	140/52/140	5	ETK10140E
Bend 90° 151x50	White RAL 9010	190/52/190	5	ETK15140
T-piece				
T-piece to be used in T-junctions between installation trunking of the same size. To be snapped onto the installation trunking base. Material: PC/ABS.				
T-Piece 101x34/50	White RAL 9010	138/52/171	5	ETK10151E
T-Piece 151x50	White RAL 9010	190/52/221	5	ETK15153

P126222



P126230



P126209

P126210

Range
Installation trunking

Accessories Installation trunking Ultra

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Joint cover piece, kit				
Joint cover piece, kit including three pieces, one upper, one lower, and one front piece. Intended to cover joints between installation trunking covers. To be fixed onto the installation trunking base. Material: PC/ABS.				
Joint cover piece 101x34/50	White RAL 9010	104/52/32	10	ETK10170E
Joint cover piece 151x50 for 120 mm front cover	White RAL 9010	156/53/32	10	ETK15170
Joint cover piece 151x50 for 75 + 40 mm front cover	White RAL 9010	155/53/30	10	ETK151702
Stop end				
Stop end to be snapped onto the end of the installation trunking base. Material: PC/ABS.				
Stop end 101x34/50	White RAL 9010	101/13/52	10	ETK100060E
Stop end 151x50	White RAL 9010	155/17/52	16	ETK150060
Cable shelf				
Single cable shelf to be mounted in the installation trunking base, providing separation between power and low voltage cables. Supplied in lengths of 2 m. Material: PVC.				
Cable shelf 101x34	White RAL 9010	28/12/2000	32 m	ETK100095
Cable shelf 101x50 and 151x50	White RAL 9010	43/15/2000	32 m	ETK100092E
Partition wall				
Partition wall to be mounted in 151x50 trunking in order to assemble wiring devices and provide separation between power and low voltage cables. Material: PVC.				
Partition wall 151x50	White RAL 9010	48/14/2000	24 m	ETK151504
Cable retainer				
Cable retainer to be snapped inside the installation trunking base to keep cables in place during the installation phase. Material: PC/ABS.				
Cable retainer 101x34/50	White RAL 9010	9/30/81	10	ETK10171E
Cable retainer 151x50	White RAL 9010	11/30/125	10	ETK15171
Branching piece				
Branching piece to be used between installation trunking of different sizes. Material: PC/ABS.				
Branching piece for 101x34 – 101x50	White RAL 9010	105/52/66	5	ETK10154E
Branching piece for 151x50 – 101x50	White RAL 9010	155/52/66	5	ETK15154
Adaptor for wiring devices				
Adaptor including front plate. Suitable for 45x45 module wiring devices, type Altira and similar. Can only be snap-fitted into 75 mm front opening. Material: ABS.				
Adaptor for 1-module wiring device	White RAL 9010	85/22/80	5	ETK10198E
Adaptor for 2-module wiring devices	White RAL 9010	85/22/120	5	ETK10197E
Adaptor for 3-module wiring devices	White RAL 9010	85/22/170	5	ETK10187E
Adaptor for 4-module wiring devices	White RAL 9010	85/22/215	5	ETK10183E

P127146



P126211

P126221



P127003



P126223

P126227

P127139



P127138

P127137

P127136

Accessories Installation trunking Ultra

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Universal adaptor				
Universal adaptor including two screws. Suitable for c/c 60 mm wiring devices. Can only be snap-fitted into 75 mm front opening. Material: ABS.				
Universal adaptor, single	White RAL 9010	88/17/112	5	ETK10194
Universal adaptor, double	White RAL 9010	88/17/183	5	ETK10186
Universal adaptor, triple	White RAL 9010	88/17/255	5	ETK10181
Universal adaptor, single, high	White RAL 9010	88/25/112	5	ETK10191
Universal adaptor, double, high	White RAL 9010	88/28/183	5	ETK10196
Universal adaptor, triple, high	White RAL 9010	88/27/257	5	ETK10182
Socket outlets				
Power socket outlet for 45x45 module earthed plug, with pin or side earth and child protection. 250V 16A. Material: PC/ABS.				
Power socket outlet, pin-earthed	Red	45/41/45	10	ETK21046E
Power socket outlet, side-earthed	White	45/41/45	10	ETK21045E

P 126235
P 127140



P127841



P127842



Range
Mini-trunking
For wiring device adaption

Mini-trunking Ultra for wiring device adaptation

	Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
	Mini-trunking with one compartment				
	One-compartment mini-trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. Available with and without self-adhesive fixing tape. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
P126545	Mini-trunking 21x12	White RAL 9010	21/12/2000	128 m	ETK21012
	Mini-trunking 21x12 self-adhesive	White RAL 9010	21/12/2000	128 m	ETK21912
P126546	Mini-trunking 32x17	White RAL 9010	32/17/2000	60 m	ETK32017
	Mini-trunking 32x17 self-adhesive	White RAL 9010	32/17/2000	60 m	ETK32917
	Mini-trunking with two compartments				
P126215	Two-compartment mini-trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. The compartments are separated by integrated partition wall. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
	Mini-trunking 40x17	White RAL 9010	40/17/2000	60 m	ETK40017
	Mini-trunking with three compartments				
P126216	Three-compartment mini-trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. The compartments are separated by an integrated partition walls. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
	Mini-trunking 60x21	White RAL 9010	60/21/2000	40 m	ETK60021
	Mini-trunking 74x21	White RAL 9010	74/21/2000	24 m	ETK74021

Accessories Mini-trunking Ultra for wiring device adaptation

	Internal corner, adjustable				
	Internal corner to be snapped onto the mini-trunking base. Adjustability: ±5°. Material: ABS.				
P126207	Internal corner 21x12, adjustable	White RAL 9010	23/41.5/41.5	5	ETK20520
	Internal corner 32x17, adjustable	White RAL 9010	20/55/55	20	ETK32020
	Internal corner 40x17, adjustable	White RAL 9010	47/60/60	20	ETK40020
	Internal corner 60x21, adjustable,	White RAL 9010	65/46/47	10	ETK60020
	Internal corner 74x21, adjustable	White RAL 9010	79/47/48	10	ETK74020
	External corner, adjustable				
	External corner to be snapped onto the mini-trunking base. Adjustability: ±5°. Material: ABS.				
P126208	External corner 21x12, adjustable	White RAL 9010	22/40.5/40.5	5	ETK20530
	External corner 32x17, adjustable	White RAL 9010	20/55/55.5	20	ETK32030
	External corner 40x17, adjustable	White RAL 9010	46.5/41/44	20	ETK40030
	External corner 60x21, adjustable	White RAL 9010	65/46/46	10	ETK60030
	External corner 74x21, adjustable	White RAL 9010	78.5/48/49	10	ETK74030
	Bend, 90°				
	90 degree bend to be used in junctions between horizontal and vertical applications. To be snapped onto the mini-trunking base. Material: ABS.				
P126209	Bend 90° 21x12	White RAL 9010	14/35/35	10	ETK20540
	Bend 90° 32x17	White RAL 9010	19/55/55	10	ETK32040
	Bend 90° 40x17	White RAL 9010	16/66/66	10	ETK40040
	Bend 90° 60x21	White RAL 9010	21/92/92	10	ETK60040
	Bend 90° 74x21	White RAL 9010	23/104/103	10	ETK74040

Range
Mini-trunking
For wiring device adaption

Accessories Mini-trunking Ultra for wiring device adaptation

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
T-piece				
T-piece to be used in T-junctions between mini-trunking of the same size. To be snapped onto the mini-trunking base. Material: ABS.				
T-Piece 21x12	White RAL 9010	14/35/45	10	ETK20550
T-Piece 32x17	White RAL 9010	19/55/76	10	ETK32050
T-Piece 40x17	White RAL 9010	16/66/92	10	ETK40050
T-Piece 60x21	White RAL 9010	23/85/115	10	ETK60050
T-Piece 74x21	White RAL 9010	23/104/125	10	ETK74050
Joint cover piece				
Joint cover piece to cover joints between mini-trunking covers. To be snapped onto the mini-trunking base. Material: ABS.				
Joint cover piece 21x12	White RAL 9010	23/14/15	20	ETK20570
Joint cover piece 32x17	White RAL 9010	35/20/16	20	ETK32070
Joint cover piece 40x17	White RAL 9010	41/21/16	20	ETK40070
Joint cover piece 60x21	White RAL 9010	62/23/16	20	ETK60070
Joint cover piece 74x21	White RAL 9010	78/23/26	20	ETK74070
Stop end				
Stop end to be snapped onto the end of the mini-trunking base. Material: ABS.				
Stop end 21x12	White RAL 9010	23/13/7	20	ETK20560
Stop end 32x17	White RAL 9010	33.5/19/8	20	ETK32060
Stop end 40x17	White RAL 9010	42/18/8.5	20	ETK40060
Stop end 60x21	White RAL 9010	65/24/10	20	ETK60060
Stop end 74x21	White RAL 9010	78/23/10	20	ETK74060
Cable retainer				
Cable retainer to be snapped inside the mini-trunking base to keep cables in place during the installation phase. Material: ABS.				
Cable retainer 21x12	White RAL 9010	3.5/15/26	20	ETK20571
Cable retainer 32x17	White RAL 9010	3.5/25/27	20	ETK32071
Cable retainer 40x17	White RAL 9010	3.5/33/27	20	ETK40071
Cable retainer 60x21	White RAL 9010	4.5/52.5/32	20	ETK60071
Cable retainer 74x21	White RAL 9010	3.5/67/39.5	20	ETK74071
Branching piece				
Branching piece to be used in T-junctions between mini-trunking of different sizes. Material: ABS.				
Branching piece for 21x12 – 60x21	White RAL 9010	86/23/105	5	ETK60022
Branching piece for 21x12 – 74x21	White RAL 9010	101/23/104	5	ETK74022
Branching piece for 32x17 – 60x21	White RAL 9010	86/23/105	5	ETK60032
Branching piece for 32x17 – 74x21	White RAL 9010	101/23/104	5	ETK74032
Branching piece for 40x17 – 60x21	White RAL 9010	86/23/105	5	ETK60041
Branching piece for 40x17 – 74x21	White RAL 9010	101/23/104	5	ETK74041
Universal installation box kit				
Installation box kit including installation box, adaptor and fixing screws. Suitable for c/c 60 mm wiring devices. Material: ABS.				
Universal installation box kit, single	White RAL 9010	40/92/86	5	ETK20580
Universal installation box kit, double	White RAL 9010	40/92/156	5	ETK20596

P126210

P126212

P126211

P126223

P126213


P127141


P127142


Range
Mini-trunking
For wiring device adaption

Accessories Mini-trunking Ultra for wiring device adaptation

	Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
	Installation box kit				
	Installation box kit including installation box, adaptor and fixing screws. Suitable for 45x45 module wiring devices. Material: ABS.				
P126218 	Installation box kit, 1-module wiring device	White RAL 9010	50/86/96	4	ETK20598
P126219 	Installation box kit, 2-module wiring device	White RAL 9010	50/92/114	5	ETK20680
P126217 	Installation box kit, 3-module wiring device	White RAL 9010	50/90.5/156	5	ETK20597

Range
Mini-trunking
For cable distribution

Mini-trunking Ultra for cable distribution

P126978



Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Mini-trunking				
One-compartment mini-trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
Mini-trunking 16x16	White RAL 9010	16/16/2000	132 m	ETK16316
Mini-trunking 25x16	White RAL 9010	25/16/2000	104 m	ETK25316
Mini-trunking 25x25	White RAL 9010	25/25/2000	64 m	ETK25325
Mini-trunking 40x16	White RAL 9010	40/16/2000	84 m	ETK40316
Mini-trunking 40x25	White RAL 9010	40/25/2000	60 m	ETK40325
Mini-trunking, self-adhesive				
One-compartment mini-trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. Provided with self-adhesive fixing tape. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
Mini-trunking 16x16 self-adhesive	White RAL 9010	16/16/2000	156 m	ETK16916
Mini-trunking 25x16 self-adhesive	White RAL 9010 White RAL 9010	25/16/2000	84 m	ETK25916
Mini-trunking 25x25 self-adhesive		25/25/2000	64 m	ETK25925
Distribution trunking				
One-compartment distribution trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
Distribution trunking 40x40	White RAL 9010	40/40/2000	36 m	ETK40340
Distribution trunking 60x25	White RAL 9010	60/25/2000	32 m	ETK60325
Distribution trunking 60x40	White RAL 9010	60/40/2000	24 m	ETK60340
Distribution trunking 60x60	White RAL 9010	60/60/2000	16 m	ETK60360

Accessories Mini-trunking Ultra for cable distribution

P126207



Internal corner, adjustable				
Internal corner to be snapped onto the mini-trunking base. Adjustability: ±5°. Material: ABS.				
Internal corner 16x16, adjustable	White RAL 9010	16/32/35	60	ETK16320
Internal corner 25x16, 25x25, adjustable	White RAL 9010	29/45/45	40	ETK25320
Internal corner 40x16, 40x25, 40x40, adj.	White RAL 9010	43/62/62	36	ETK40320
Internal corner 60x25, 60x40, 60x60, adj.	White RAL 9010	86/71/89	14	ETK60320
External corner, adjustable				
External corner to be snapped onto the mini-trunking base. Adjustability: ±5°. Material: ABS.				
External corner 16x16, adjustable	White RAL 9010	16/32/35	60	ETK16330
External corner 25x16, 25x25, adj.	White RAL 9010	28/45/45	40	ETK25330
External corner 40x16, 40x25, 40x40, adjustable	White RAL 9010	43/62/62	36	ETK40330
External corner 60x25, 60x40, 60x60, adjustable	White RAL 9010	84/85/85	12	ETK60330
Bend, 90°				
90 degree bend to be used in junctions between horizontal and vertical applications. To be snapped onto the mini-trunking base. Material: ABS.				
Bend 90° 16x16	White RAL 9010	15/31/31	60	ETK16340
Bend 90° 25x16, 25x25	White RAL 9010	27/45/45	40	ETK25341
Bend 90° 40x16, 40x25, 40x40	White RAL 9010	41/60/60	40	ETK40341
Bend 90° 60x25, 60x40, 60x60	White RAL 9010	62/85.5/85.5	18	ETK60341

P126208



P126209

Range
Mini-trunking
For cable distribution

Accessories Mini-trunking Ultra for cable distribution

P126210

P126212

P126211

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
T-piece				
T-piece to be used in T-junctions between mini-trunking of the same size. To be snapped onto the mini-trunking base. Material: ABS.				
T-Piece 16x16	White RAL 9010	15/31/42	60	ETK16350
T-Piece 25x16, 25x25	White RAL 9010	27/45/65	40	ETK25350
T-Piece 40x16, 40x25, 40x40	White RAL 9010	41/60/77	40	ETK40350
T-Piece 60x25, 60x40, 60x60	White RAL 9010	62/86/105	18	ETK60350
Joint cover piece				
Joint cover piece to cover joints between mini-trunking covers. To be snapped onto the mini-trunking base. Material: ABS.				
Joint cover piece 16x16	White RAL 9010	18/19/15	50	ETK16370
Joint cover piece 25x16, 25x25	White RAL 9010	26.5/28/16	50	ETK25370
Joint cover piece 40x16, 40x25, 40x40	White RAL 9010	40.5/43/20	60	ETK40370
Joint cover piece 60x25, 60x40, 60x60	White RAL 9010	63/65/10	25	ETK60370
Stop end				
Stop end to be snapped onto the end of the mini-trunking base. Material: ABS.				
Stop end 16x16	White RAL 9010	18/18/5	60	ETK16361
Stop end 25x16, 25x25	White RAL 9010	27/27/7	60	ETK25361
Stop end 40x16, 40x25, 40x40	White RAL 9010	62/43/10	50	ETK40361
Stop end 60x25, 60x40, 60x60	White RAL 9010	63/65/10	50	ETK60361

Range
Skirting trunking

Skirting trunking Ultra

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Skirting trunking				
Three-compartment skirting trunking made up by a base profile with pre-punched mounting holes on every 23rd cm and a snap-fitted front cover. Suitable for power and low voltage cables. Supplied in 2 m lengths. Material: PVC.				
Skirting 70x20	White RAL 9010	70/20/2000	30 m	ETK70221

Accessories skirting trunking Ultra

Type	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Internal corner, adjustable				
Adjustable internal corner to be snapped onto the skirting trunking base. Adjustability: ±5°. Material: ABS.				
Internal corner 70x20	White RAL 9010	74/50/50	10	ETK70220
External corner, adjustable				
Adjustable external corner to be snapped onto the skirting trunking base. Adjustability: ±5°. Material: ABS.				
External corner 70x20	White RAL 9010	74/37/40	10	ETK70230
Joint cover piece				
Joint cover piece to cover joints between skirting trunking covers. To be snapped onto the skirting trunking base. Material: ABS.				
Joint cover piece 70x20	White RAL 9010	71/20/21	20	ETK70270
Stop end				
Stop end to be snapped onto the end of the skirting trunking base, available as left-hand and right-hand. Material: ABS.				
Stop end 70x20, left	White RAL 9010	71/22/16	20	ETK70262
Stop end 70x20, right	White RAL 9010	71/22/16	20	ETK70261
Universal installation box kit				
Installation box kit including installation box, adaptor and fixing screws. Suitable for c/c 60 mm wiring devices. Material: ABS.				
Universal installation box kit, single	White RAL 9010	40/112/86	4	ETK70280
Universal installation box kit, double	White RAL 9010	40/112/158.5	4	ETK70296
Installation box kit				
Installation box kit including installation box, adaptor and fixing screws. Suitable for 45x45 module wiring devices. Material: ABS.				
Installation box kit, 1-module wiring device	White RAL 9010	52.5/112/86	4	ETK70298
Installation box kit, 2-module wiring device	White RAL 9010	53.5/112/113.5	4	ETK70295
Installation box kit, 3-module wiring device	White RAL 9010	53.5/112/158.5	4	ETK70297

Technical description
Installation, Mini-trunking and Skirting trunking

Description
The Ultra Installation trunking, Mini-trunking and Skirting trunking are available in several sizes to fit all needs. They are made of high-grade PVC that is both easy to clean and resistant to impact.

A choice between one-, two- and three-compartment trunking guarantees separation of data and power, respecting the specific requirements for installation of VDI cables.


The wide range of accessories and adaptors for wiring devices makes the trunking ideal for installations in commercial buildings.

The Mini-trunking is also very suitable for installations in residential buildings.

Technical and Material data

PVC	Characteristics:	Rigid, self-extinguishing, cadmium-free, lead-free
	Colour:	White RAL 9010
ABS	Characteristics:	Halogen-free
	Colours:	White RAL 9010
Degree of protection	IP40	
Temperature range	Min. storage and transportation temperature	-25°C
	Min. installation and application temperature	-5°C
	Max. application temperature	+60°C
Resistance to impact	2J (IK07)	
Delivery lengths	2 metres	
Standards and certificates	The product complies with the standards: • EN 50085-1:2005 • EN 50085-2-1:2006	
	The products also satisfy the provisions for CE marking according to the European Directive 2006/95/CE.	


Pre-punched mounting holes

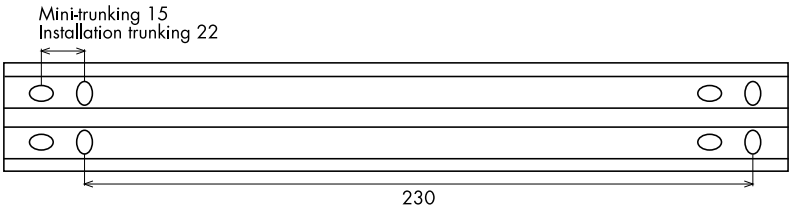


Technical information
Design and dimensions

Mini-trunking


21x12




32x17




40x17



60x21




74x21




Mini- and distribution trunking


16x16




25x16




25x25




40x16




40x25




40x40




60x25



60x40




60x60




Installation trunking


101x34

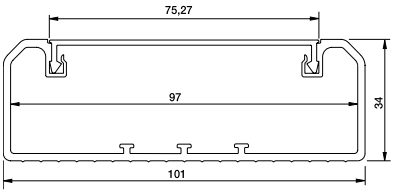


101x34 with snapped-in cable shelves

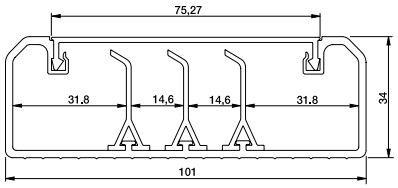


101x50

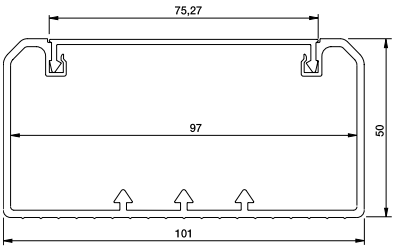


101x50 with snapped-in cable shelf

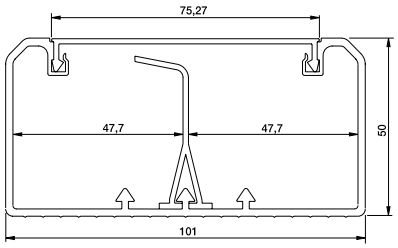


151x50

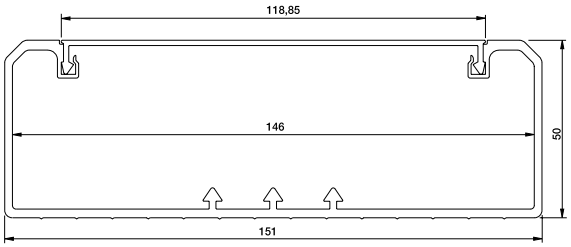

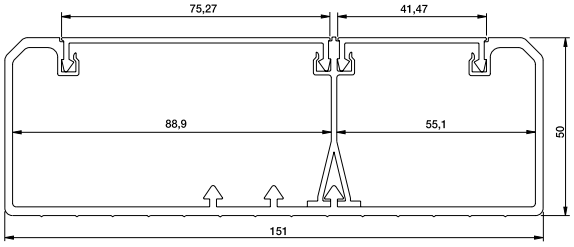


151x50 with snapped-in cable shelf

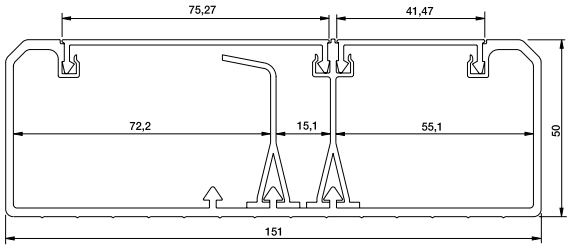


Skirting trunking

70x20



Ultra

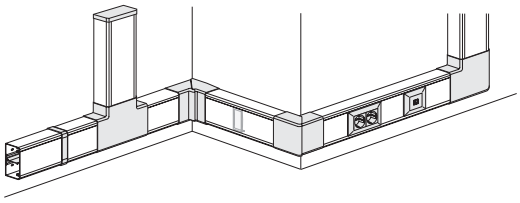


Installation trunking


ETK10150E
ISM17010

Schneider Electric


Installation trunking

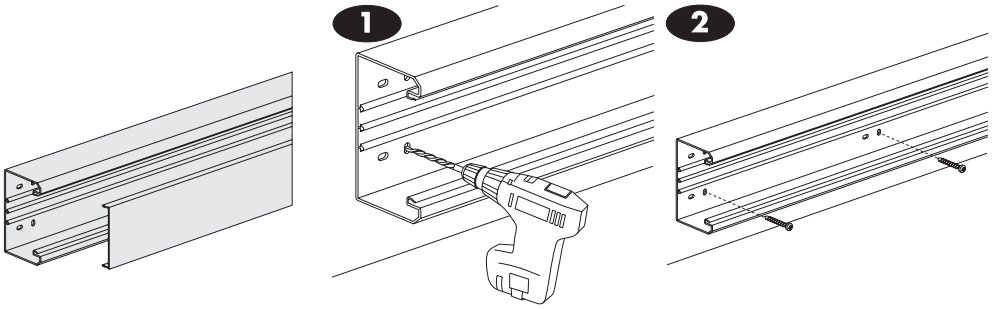


Cable retainer

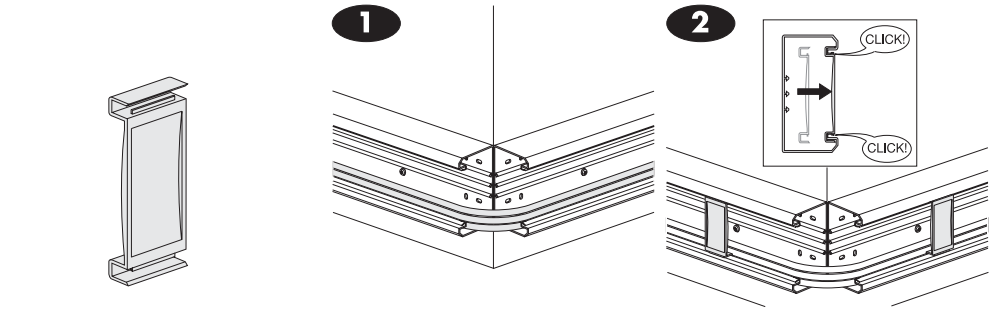

External corner

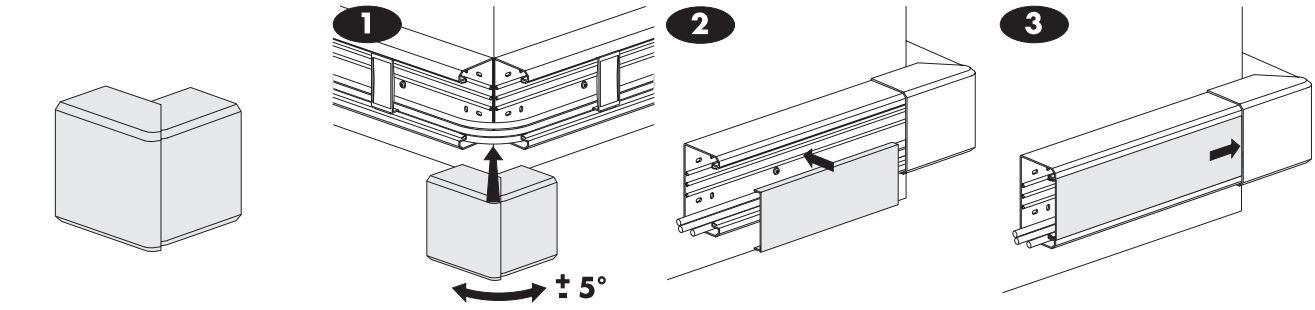



Internal corner

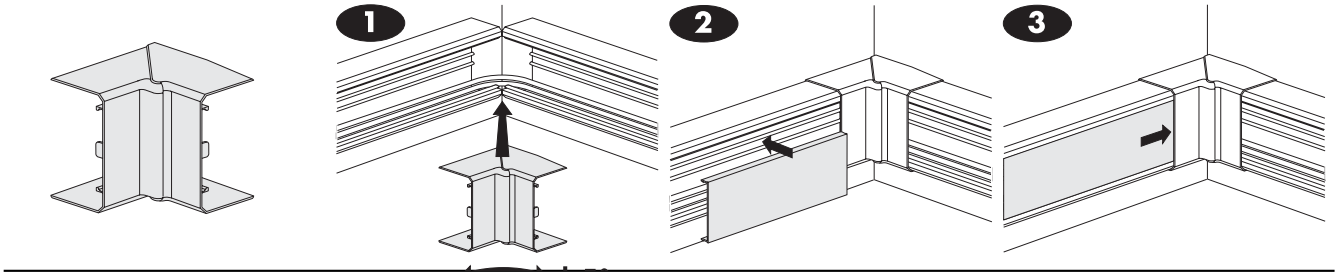



Mounting instruction
Installation trunking


Bend, 90°



















T-piece




















Cable shelf









Mounting instruction
Installation trunking


Stop end

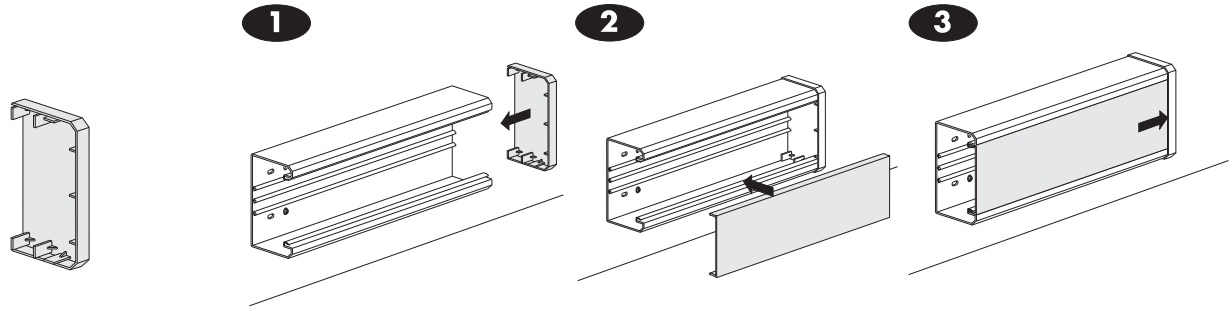


Joint cover piece kit

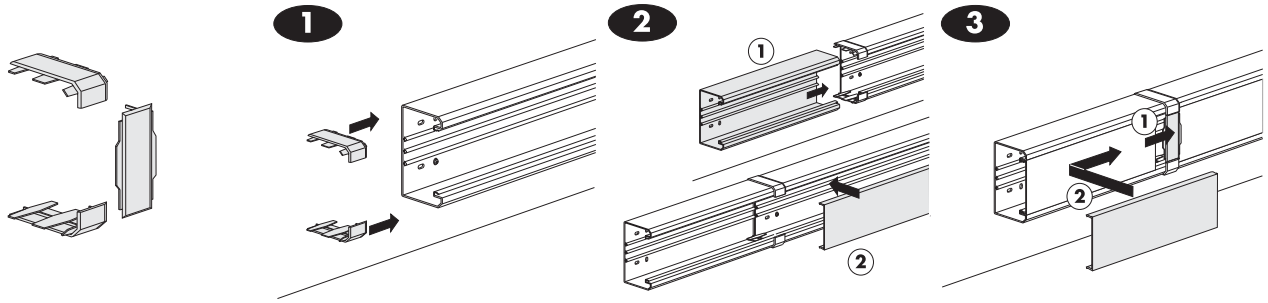

Adaptors

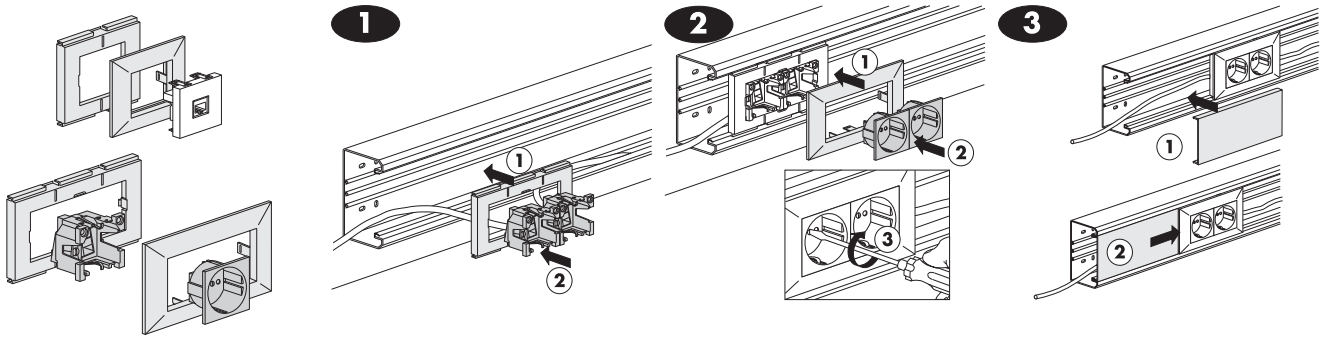

Installation trunking, two compartments

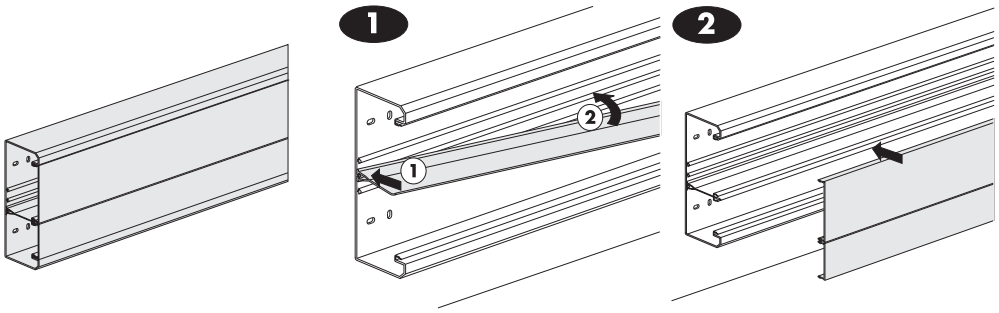

* Make the most of your energy

LSB02433_EN © Schneider Electric – All rights reserved

Schneider Electric Industries SAS
35 rue Joseph Monier
92500 Rueil-Malmaison
France
www.schneider-electric.com

As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.

This document has been printed
on ecological paper

Publishing: Schneider Electric Industries SAS
Design:
Illustrations:
Photos:
Printing:

09-2011