

SOCKET WITHOUT RELIEF HOUSING 3 POLE PIN SPACING 10 MM / 0.394 IN 100% PROTECTED AGAINST MISMATING

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

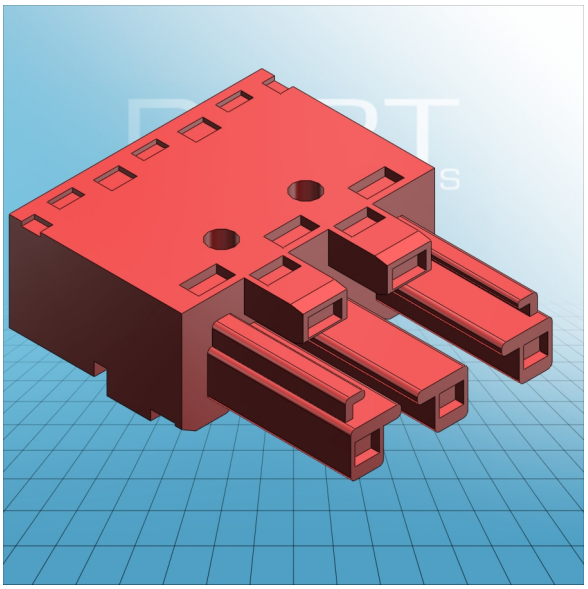

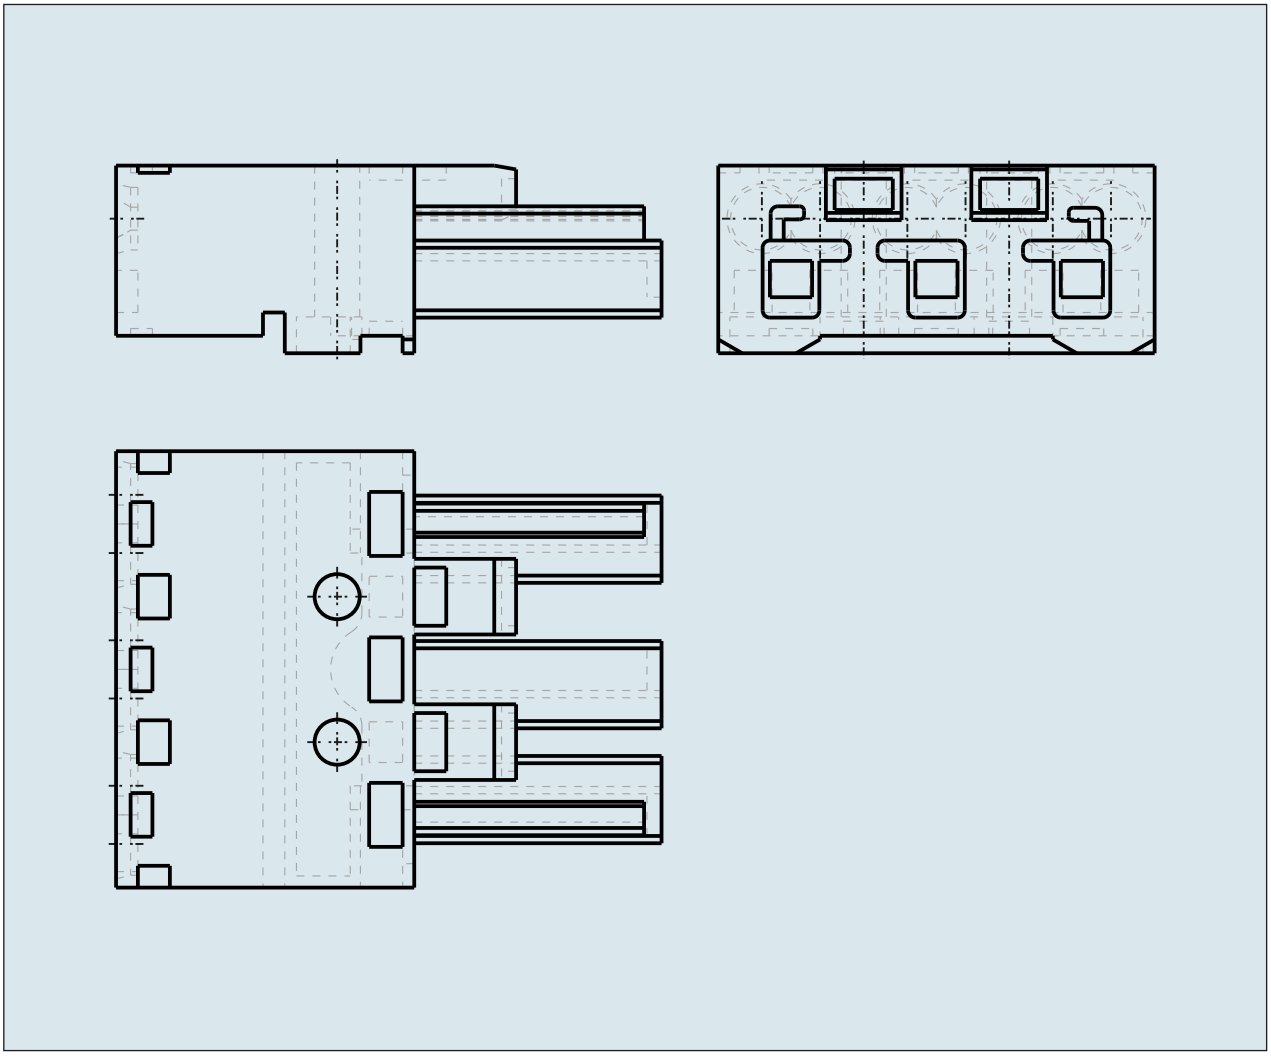

SOCKET WITHOUT RELIEF HOUSING 3 POLE PIN SPACING 10 MM / 0.394 IN 100% PROTECTED AGAINST MISMATING

770-1303

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

ITEM-NO. (ITEM-NO.)	770-1303
Cross section1 (Cross section / mm²)	0.5 - 4
Cross section2 (Cross section / AWG)	20 - 12
Strip length (Strip length / mm)	9
Measured voltage (Measured voltage / V)	250
Measured shock voltage (Measured shock voltage / kV)	4
Pollution degree (Pollution degree)	3
Current intensity (Current intensity / A)	25
P (NO. OF POLES)	3
Height (Height / mm)	12.9
Width (Width / mm)	30
Depth (Depth / mm)	37.5
No. of connection Points (No. of connection Points)	6
No. of potentials (No. of potentials)	3
COLOR (COLOR)	rot